


CDE14

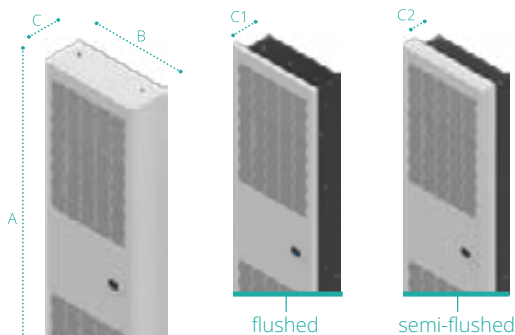

CODE		M.U.	CDE14U320380000	CDE14A322080000		CDE14U322080000		CDE14A322880000	
UL LISTED			✓	--		✓		--	
Rated Voltage		V, ~	115,1	230,1		230,1		400,2	460, 2
Nominal Frequency		Hz	60	50	60	50	60	50	60
Cooling Capacity	L35L35	W	1400	1400	1500	---		1500	1400
Cooling Capacity	L35L50	W	1150	1150	1250	---		1250	1150
Power Consumption	L35L50	W	930	730	820	---		820	730
Max current consumption.		A	9,41	4,5	4,3	3,9 (4,1 60°C)		4,23	2,7
Start-up current	CE	A	---	28		28		43	
Internal operating temp..	min/max	°C	25/45	25/45		25/45		25/45	
External operating temp.	min/max	°C	20/55	20/60		20/60	20/55	20/60	
Protection Degree internal circuit	CE	IP	---	54		54		54	
	UL	Type	12	---		---	12	12	--
External sound pressure		dB(A)	60	60		60		60	
Height (A)		mm	1666	1666		1666		1666	
Width (B)		mm	454	454		454		454	
Depth (C - C1 - C2)		mm	181 - 156 - 111	181 - 156 - 111		181 - 156 - 111		181 - 156 - 111	
Weight		kg	51	51		51		57	