


CDE20

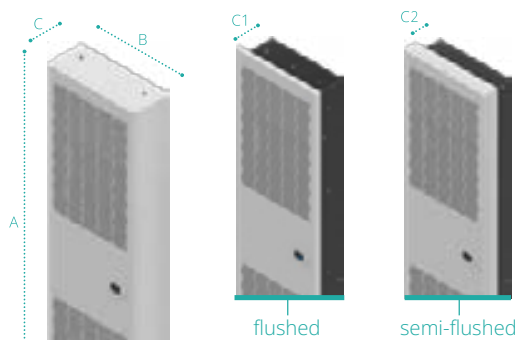

CODE		M.U.	CDE20U320380000	CDE20A322080000	CDE20U322080000	CDE20A326180000	CDE20U326280000					
UL LISTED			✓	--	✓	--	✓					
Rated Voltage		V, ~	115,1	230,1		400,3	460,3	400,3	460,3			
Nominal Frequency		Hz	60	50	60	50	60	50	60			
Cooling Capacity	L35L35	W	2000	2100	2200	---	2200	2100	2200	---	2200	
Cooling Capacity	L35L50	W	1550	1675	1700	---	1700	1675	1700	---	1700	
Power Consumption	L35L50	W	1320	1230	1460	---	1460	1030	1250	---	1250	
Max current consumption		A	14,52	6,6	7,7	6,3 (6,6 60°C)	7,2	2,2 (2,2 60°C)	2,3	2,2 (2,2 60°C)	2,36	
Start-up current	CE	A	---	34		34		40		40		
Internal operating temp..	min/max	°C	25/45		25/45		25/45		25/45			
External operating temp.	min/max	°C	20/45		20/60		20/55	20/60		20/55	20/60	
Protection Degree internal circuit	CE	IP	---		54		54		54			
	UL	Type	12		---		12	---		---	12	
External sound pressure		dB(A)	68		68		68		68			
Height (A)		mm	1666		1666		1666		1666			
Width (B)		mm	454		454		454		454			
Depth (C - C1 - C2)		mm	181 - 156 - 111		181 - 156 - 111		181 - 156 - 111		181 - 156 - 111			
Weight		kg	55		55		55		55			