


CDE30

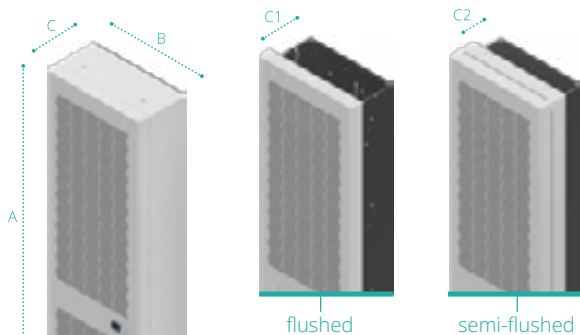

CODE		M.U.	CDE30A322080000	CDE30U322080000	CDE30A326180000	CDE30U326280000				
UL LISTED			--	✓	--	✓				
Rated Voltage		V, ~	230,1		400,3	460,3	400,3	460,3		
Nominal Frequency		Hz	50	60	50	60	50	60		
Cooling Capacity	L35L35	W	3050	3200	---	3200	3050	3200	---	3200
Cooling Capacity	L35L50	W	2500	2750	---	2750	2500	2750	---	2750
Power Consumption	L35L50	W	1295	1600	---	1600	1300	1570	---	1650
Max current consumption.		A	6,6	8	6,3 (6,6 60°C)	7,6	3,1	3,2	3 (3,1 60°C)	2,9
Start-up current	CE	A	30		36		62		62	
Internal operating temp..	min/max	°C	25/45		25/45		25/45		25/45	
External operating temp.	min/max	°C	20/60		20/60	20/55	20/60		20/60	20/55
Protection Degree internal circuit	CE	IP	54		54		54		54	
	UL	Type	---		---	12	---		---	12
External sound pressure		dB(A)	69		69		69		69	
Height (A)		mm	1666		1666		1666		1666	
Width (B)		mm	496		496		496		496	
Depth (C - C1 - C2)		mm	221 -195 - 121		221 -195 - 121		221 -195 - 121		221 -195 - 121	
Weight		kg	59		59		69		69	