


## CDE40

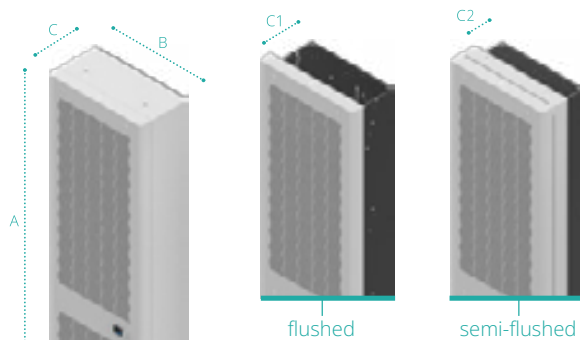

CODE		M.U.	CDE40A326180000		CDE40U326280000	
UL LISTED			--		✓	
Rated Voltage		V, ~	400,3	460,3	400,3	460,3
Nominal Frequency		Hz	50	60	50	60
Cooling Capacity	L35L35	W	3950	4090	--	4090
Cooling Capacity	L35L50	W	3210	3400	--	3400
Power Consumption	L35L50	W	1895	2390	--	1990
Max current consumption.		A	4,2	4,7	3,3	3,5
Start-up current	CE	A	25		21	
Internal operating temp..	min/max	°C	25/45		25/45	
External operating temp.	min/max	°C	20/60		20/55	
Protection Degree internal circuit	CE	IP	54		54	
	UL	Type	---		--	12
External sound pressure		dB(A)	72		72	
Height (A)		mm	1666		1666	
Width (B)		mm	496		496	
Depth (C - C1 - C2)		mm	256 -195 - 121		256 -195 - 121	
Weight		kg	79		79	