
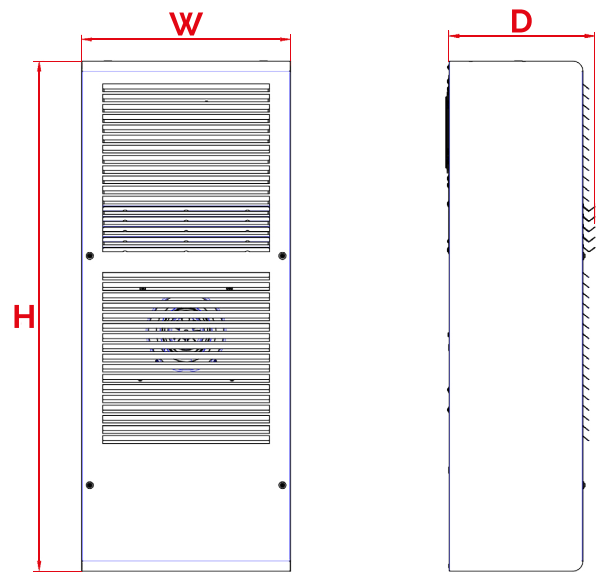


Protherm Outdoor - CVO20

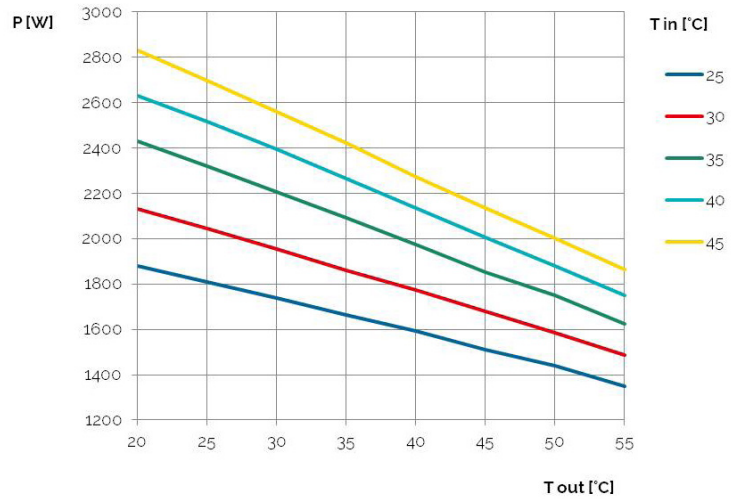

| CODICE - CODE - ARTIKELNUMMER - CODIGO | M.U. | CVO20002208000 | CVO20002618000 | CVO20U12038000 | CVO20U12208000 | CVO20U12628000 |
|--|---------|----------------|----------------------|----------------|----------------|----------------------|
| Potenza di raffreddamento - Cooling Capacity - Kälteleistung - Capacidad de refrigeración L35L35 - EN14511-2 | W | 2100 - 2200 | 2000 - 2100 | 2200 | 2200 | 2100 |
| Potenza di raffreddamento - Cooling Capacity - Kälteleistung - Capacidad de refrigeración L35L50 - EN14511-2 | W | 1750 - 1850 | 1700 - 1800 | 1850 | 1850 | 1800 |
| Alimentazione - Power Supply - Spannungsversorgung - Alimentación eléctrica | V-ph-Hz | 230-1-50/60 | 400-3-50 460-3-60 | 115-1-60 | 230-1-50/60 | 400-3-50 460-3-60 |
| Altezza/Larghezza/Profondità - Height/width/Depth - Höhe/Breite/Tiefe - Altura/Ancho/Profundidad (HxWxD) | mm | 999x409x286 | 999x409x286 | 999x409x286 | 999x409x286 | 999x409x286 |
| Corrente Max assorbita - Max absorbed current - Max. Stromaufnahme - Corriente máxima absorbida (1) | A | 4.8 / 5.5 | 2.5 / 2.7 | 13.64 | 6.3 | 3.62 |
| Corrente assorbita alla partenza - Starting Current - Anlaufstrom - Corriente de arranque | A | 34 | 22 | 60 | 34 | 22 |
| Fusibile T - T PreFuse - Absicherung - Fusibile T | A | 10 | 6 | 25 | 15 | 15 |
| Potenza Assorbita - Power Consumption - Leistungsaufnahme - Potencia Absorbida L35L50 - EN14511-2 | W | 1120 - 1240 | 1100 - 1200 | 1240 | 1240 | 1200 |
| Portata aria ventilatore lato armadio, bocca libera - Cabinet fan flow, free blowing - Luftleistung Schrankseite, freiblasend - Caudal del ventilador, soplado directo | m³/h | 540 - 580 | 890 - 930 | 930 | 580 | 930 |
| Limiti regolazione Temperatura - Cabinet Temperature Limits - Temperatur Einstellbereich - Limites de temperatura en el armario | °C | +25 / +45 | +25 / +45 | +25 / +45 | +25 / +45 | +25 / +45 |
| Limiti Temperatura lato Ambiente - Ambient Temperature Limits - Grenzwerte Umgebungstemperatur - Limites de temperatura ambiente | °C | -20 / +55 | -20 / +55 | -40 / +55 | -40 / +55 | -40 / +55 |
| Protezione lato armadio - Cabinet Protection Degree - Schutzgrad Schrankseite - Clase de protección del armario | IP/Type | 54 / - | 54 / - | - / 4 | - / 4 | - / 4 |
| Rumorosità - Noise Level - Geräuschpegel - Nivel de ruido | dB(A) | 66 | 66 | 66 | 66 | 66 |
| Peso - Weight - Gewicht - Peso | kg | 48 | 48 | 48 | 48 | 48 |