


PRT20H/F
PRT200

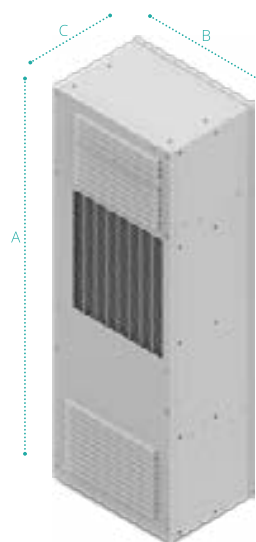

| CODE | | M.U. | PRT20HA3201000 | PRT20FA3201000 | PRT20FD3121000 | PRT200D3121000 |
|------------------------------------|---------|--------|--------------------|----------------|----------------|----------------|
| Power Supply | | V ~ Hz | 230-1-50/60 +48VDC | 230-1-50/60 | 48VDC | 48VDC |
| Cooling Capacity | L35L35 | W | 2000 | 2000 | 2000 | 2000 |
| Cooling Capacity | L35L50 | W | 1750 | 1750 | 1750 | 1750 |
| Power consumption - L35L50 | @230VAC | W | 1100 | 1200 | -- | -- |
| | @48VDC | W | 100 | -- | 1390 | 1390 |
| Current consumption - L35L35 | @230VAC | A | 5,5 | 5,3 | -- | -- |
| | @48VDC | A | 2,4 | -- | 29 | 29 |
| Start-up current | @230VAC | A | 20 | 20 | -- | -- |
| Internal operating temp.. | min/max | °C | +25 / +45 | +25 / +45 | +25 / +45 | +25 / +45 |
| External operating temp. | min/max | °C | -20 / +60 | -20 / +60 | -20 / +60 | -20 / +60 |
| Internal circuit protection degree | CE | IP | 54 | 54 | 54 | 54 |
| External sound pressure | | dB(A) | 60 | 60 | 69 | 69 |
| Height (A) | | mm | 1200 | 1200 | 1200 | 955 |
| Width (B) | | mm | 417 | 417 | 417 | 417 |
| Depth (C) | | mm | 300 | 300 | 300 | 300 |
| Weigth | | kg | 63 | 63 | 61 | 58 |