

### Completely pre-assembled Signal Towers / KOMPAKT 37

# K37 plug EM 24VAC/DC GN/RD



art No.:	698.220.75		NoHS2		
Series:	Kompakt 37	7	<b>ROH</b> 32	C QL) US	

MECHANICAL DATA			
Height	141 mm		
Diameter	38 mm		
Materials	PC		
Dome colour	Green Red		
Housing colour	Black		
Protection category	IP65		
Connection	M12 plug 5-pole		
Cable entry	Membrane grommet		
Cable entry minimum	d = 1 mm		
Cable entry maximum	d = 9 mm		
Tension relief	Pull-out protection		
Type of fixing	Built-in mounting		
Working temperature minimum	-20°C		
Working temperature maximum	+50°C		
Weight with packaging	112 g		
Product weight	73 g		

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	70 mA	
Rated inrush current	500 mA	
Protection class	Protection class 2	
Pollution degree	3 In the connection area: 2	

OPTICAL DATA			
Light source	LED		
Light colour	Green Red		
Optical signal image	Permanent		
Service life optical	50,000 h maximum		

APPROVAL DATA			
Conforms with CE	Yes		
WEEE	Yes		

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



### Completely pre-assembled Signal Towers / KOMPAKT 37

# K37 plug EM 24VAC/DC GN/RD


Conforms with RED directive	No	
Conform with ATEX-directive	No	
Conforms with CCC	No	
Conforms with UL	cULus	
UL Type Rating	Type 12 Type 4X	
Conforms with FCC	No	
Conforms with IC	No	
EAC certificate available	Yes	
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)	
Conforms with AS-I	No	
ICAO Certification	No	
Conforms with GL	No	
Conforms with RoHS CN	No	
Conforms with VdS	No	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

# K37 plug EM 24VAC/DC GN/RD

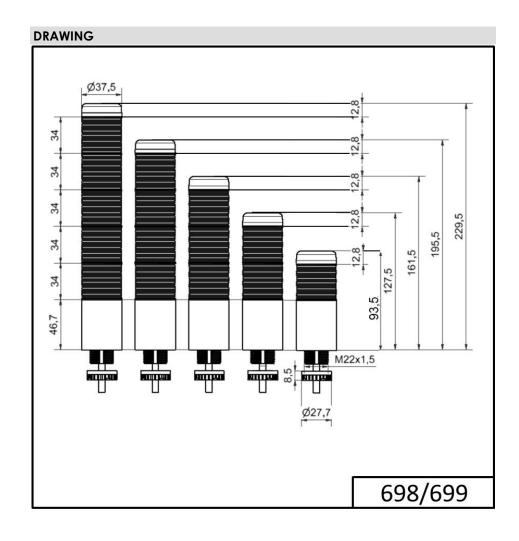

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.