

Completely pre-assembled Signal Towers / KOMPAKT 37

Product weight

K37 cable EM Pulse tone 24VAC/DC WH/GN/Y



Part No.:	699.140.75	KoHS2 CULUS UK		
Series:	Kompakt 37	CA		
MECHANICAL DATA				
Height		209 mm		
Diameter		38 mm		
Materials		PC		
Dome colour		Clear Green Red Yellow		
Housing colour		Black		
Protection category		IP65		
Connection		Cable		
cross-sectional area maximum		0,34mm ² / 22AWG		
Cable entry		Membrane grommet		
Cable entry minimum		d = 1 mm		
Cable entry maximum		d = 9 mm		
Cable length		2000 mm		
Tension relief		Pull-out protection		
Type of fixing		Built-in mounting		
Working temperature minimum		-20°C		
Working temperature maximum		+50°C		
Weight with packaging		240 g		

ELECTRICAL DATA				
Operating voltage	24V			
Operating voltage type	AC/DC			
Operating voltage frequency	50Hz			
Operating voltage tolerance	+/- 10%			
Rated operational voltage	24 VDC			
Rated operational current	160 mA			
Rated inrush current	500 mA			
Protection class	Protection class 2			
Pollution degree	3 In the connection area: 2			

199 g

OPTICAL DATA	
Light source	LED
Light colour	Green Red White Yellow

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

Optical signal image

Conforms with IC

Conforms with AS-I

ICAO Certification

Conforms with GL

Conforms with VdS

Conforms with RoHS CN

EAC certificate available

Conforms with UKCA (Importer)

K37 cable EM Pulse tone 24VAC/DC WH/GN/Y

Service life optical	50,000 h maximum
ACUSTICAL DATA	
Volume (max) at 1m distance	85,0 dB (A)
Acoustic signal image	Pulse tone
Audio frequency	2900 Hz
Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
WEEE	Yes
Conforms with RED directive	No
Conform with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	CULus
UL Type Rating	Type 12 Type 4X
Conforms with FCC	No

No

Yes

No

No

No

No

No

Yes (WERMA (UK) Ltd.)


Permanent

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37 cable EM Pulse tone 24VAC/DC WH/GN/Y

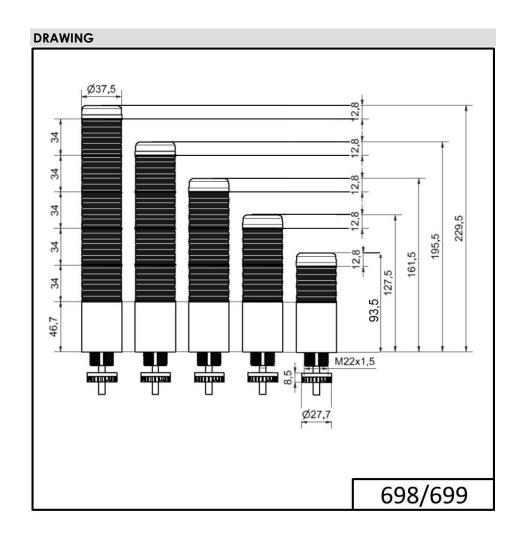

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.