Completely pre-assembled Signal Towers / KOMPAKT 37 K37 plug EM Pulse tone 24VAC/DC WH/GN/YE



i

Part No.:	699.240.75	
Series:	Kompakt 37	
MECHAN	ICAL DATA	
Height		209 mm
Diameter		38 mm
Materials		PC
Dome colour		Clear Green Red Yellow
Housing colour		Black
Protection category		IP65
Connection		M12 plug 8-pole
Cable entry		Membrane grommet
Cable entry minimum		d = 1 mm
Cable entry maximum		d = 9 mm
Tension relief		Pull-out protection
Type of fixing		Built-in mounting
Working temperature minimum		-20°C
Working temperature maximum		+50°C
Weight with packaging		156 g
Product weight		102 g
ELECTRIC	AL DATA	
Operating voltage		24V
Operating voltage type		AC/DC
Operating voltage frequency		50Hz
Operating voltage tolerance		+/- 10%
Rated operational voltage		24 VDC
Rated operational current		160 mA
Rated inrush current		500 mA
Protection class		Protection class 2
Pollution degree		3 In the connection area: 2
OPTICAL	DATA	
Light source		LED
Light colour		Green Red White Yellow
Optical signal image		Permanent
Service life optical		50,000 h maximum

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i


Completely pre-assembled Signal Towers / KOMPAKT 37 K37 plug EM Pulse tone 24VAC/DC WH/GN/YE

85,0 dB (A)
Pulse tone
2900 Hz
5,000 h minimum
Yes
Yes
No
No
No
cULus
Type 12 Type 4X
No
No
Yes
Yes (WERMA (UK) Ltd.)
No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

Completely pre-assembled Signal Towers / KOMPAKT 37 K37 plug EM Pulse tone 24VAC/DC WH/GN/YE

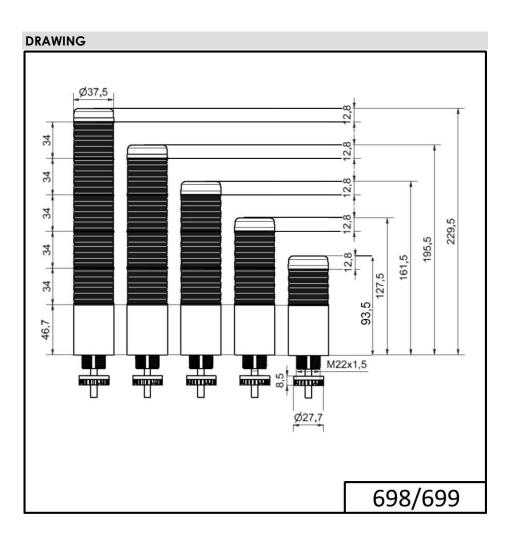

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.