



NEW

CE

UK
CA

RoHS
compliant

REACH
COMPLIANCE

Made in
Germany

UV
ISO 4892-2A

icotek®
smart cable management




ALLIOLiGHT Systemleuchten

Anschlussleitung für TUBE

- Einfacher und zeitsparender Anschluss der TUBE Systemleuchte
- Länge 10 Meter
- Anschluss über M12 Steckverbinder
- Mantelfarbe schwarz

Anschlussbild

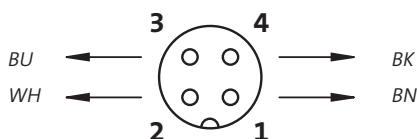

Art.-Nr. 81531

Spezifikationen

Betriebsspannung	24 V DC ±5%
Ausführung	M12 Stecker female/offenes Ende
Kodierung	A-kodiert
Querschnitt	4 x 0,34 mm ²
Länge	10000 mm
Material	Kabel: Polyurethan Überwurfmutter: Zink-Druckguss
Mantelfarbe	schwarz
Kennzeichnung	CE, UKCA
Betriebstemperatur	-40 °C bis +90 °C (statisch)
Eigenschaften	Halogenfrei, silikonfrei, UV-beständig

icotek®
smart cable management

icotek GmbH | Bischof-von-Lipp-Str. 1 | 73569 Eschach | Germany
Tel. +49 7175 9 23 80-0 | info@icotek.com | www.icotek.com



NEW

CE

UK
CA

RoHS
compliant

REACH
COMPLIANCE

Made in
Germany

UV
ISO 4892-2A


icotek®
smart cable management



ALLIOLiGHT lighting systems

Connecting cable for TUBE

- Simple and time-saving connection of the TUBE system luminaire
- Length 10 meters
- Connection via M12 connector
- Sheath colour black

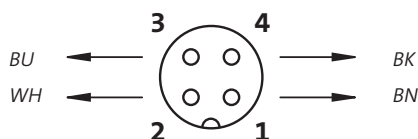

Specifications

Rated voltage	24 V DC ±5%
Version	M12 connector female/open cable end
Coding	A-coded
Cross-section	4 x 0,34 mm ²
Length	10 m
Material	Cable: Polyurethane Union nut: zinc die-cast
Sheath colour	black
Labelling	CE, UKCA
Operating temperature	-40 °C to +90 °C (static)
Properties	Halogen-free, silicone-free, UV-resistant

Order No. 81531

icotek®
smart cable management

icotek GmbH | Bischof-von-Lipp-Str. 1 | 73569 Eschach | Germany
Tel. +49 7175 9 23 80-0 | info@icotek.com | www.icotek.com