




# Off-delay Timer NLZ61NP-230V and NLZ61NP-UC



## Function rotary switches




## Typical connections



Technical data page 15-10.

## NLZ61NP-230V



### 1 NO contact not potential free 10A/250V AC. Standby loss 0.7 watt only.

Built-in device for installation. 45mm long, 45mm wide, 18mm deep.

**Zero passage switching** to protect contacts and consumers.

State-of-the-art hybrid technology combines advantages of nonwearing electronic control with high capacity of special relays.

230V control voltage, supply voltage and switching voltage.

**By using a bistable relay coil power loss and heating is avoided even in the on mode.**


The switched consumer may not be connected to the mains before the short automatic synchronisation after installation has terminated.

The top rotary switch varies the off-delay time from 1 to 12 minutes.


Operating delay settable from 0 to 12 minutes with the lower rotary switch.

**Function:** When the control contact (light switch) is closed the operating delay AV starts (if not set '0 minutes'), on time-out the fan is switched on. The set release delay RV (delay time) starts when the control contact opens and if a set operating delay has elapsed. The fan switches off on time-out.

NLZ61NP-230V	1 NO 10A	EAN 4010312603185	39,40 €/pc.
--------------	----------	-------------------	-------------




## Function rotary switches



**RV** = release delay (off-delay time)

**AV** = operating delay

## Typical connections

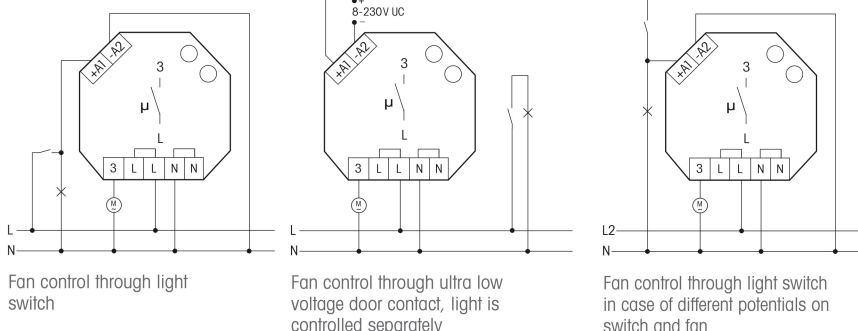

NLZ61NP-UC	1 NO 10A	EAN 4010312603048	41,60 €/pc.
------------	----------	-------------------	-------------

Technical data page 15-10.

15-12