



Sample image

Datasheet

Article number: 70042247
Designation: KG160.T203/58.VE2
Description: Switchgear

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
1000 50/60Hz						
Rated uninterrupted current Iu/Ith						
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements			
160	50	55	Ambient temperature +50°C during 24 hours with peaks up to +55°C			
Rated operational current Ie						
Utilization category						Current (A)
AC-32A						160
Voltage (V)						20 - 400
Rated operational power						
Utilization category	Voltage (V)	No. of phases	No. of poles	Power (kW)		
AC-3	220 - 240	3	3	30		
AC-3	380 - 440	3	3	45		
AC-3	660 - 690	3	3	37		
AC-23A	220 - 240	3	3	30		
AC-23A	380 - 440	3	3	55		
AC-23A	660 - 690	3	3	37		
Max. Fuse rating IEC						
Fuse characteristic						Current (A)
gG						160
No. of Fuses						1
UL60947-4-1 , UL508						
Nominal Voltage						
Voltage (V) AC / DC						
600 AC						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
600 AC						
Rated thermal current						
Current (A)		Ambient temperature (°C)		Additional Text		
200		0 - 40		ON-OFF switch (Valid when connected with wire rated for 75°C)		
160		0 - 40		Change over switch (Valid when connected with wire rated for 75°C)		
Horsepower rating						
Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]	
DOL	110 - 120	1	2	10	40	
DOL	220 - 240	1	2	25	40	
DOL	277 - 277	1	2	25	40	
DOL	440 - 480	1	2	40	40	
DOL	550 - 600	1	2	40	40	
DOL	110 - 120	3	3	20	40	
DOL	220 - 240	3	3	40	40	
DOL	440 - 480	3	3	75	40	
DOL	440 - 480	3	3	75	60	
DOL	550 - 600	3	3	60	40	
SCCR / Max. fuse rating						
<i>Conditions of acceptability</i>						
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.						
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes at 600V max., when protected by 300A Class J fuses.						
Temp. rating of wire						
Temperature rating (°C)			Current (A) Text			
75			-- --			
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	200	1	1	1	
AC	600	200	1	2	1	
AC	600	200	3	3	1	
AC double-throw function	277	160	1	1	1	
AC double-throw function	600	160	1	2	1	

General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC double-throw function	600	160	3	3	1	
General Information						
Text						
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.						
CSA						
Nominal Voltage						
				Voltage (V) AC / DC		
				600 AC		
Rated insulation voltage Ui						
				Voltage (V) AC / DC		
				600 AC		
Rated thermal current						
		Current (A)	Ambient temperature (°C)		Additional Text	
		200	0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting						
	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]	
DOL	110 - 120	1	2	10	40	
DOL	220 - 240	1	2	25	40	
DOL	277 - 277	1	2	25	40	
DOL	440 - 480	1	2	40	40	
DOL	550 - 600	1	2	40	40	
DOL	110 - 120	3	3	20	40	
DOL	220 - 240	3	3	40	40	
DOL	440 - 480	3	3	75	40	
DOL	550 - 600	3	3	60	40	
Temp. rating of wire						
		Temperature rating (°C)	Current (A)		Text	
		75	--		--	
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	200	1	1	1	
AC	600	200	1	2	1	
AC	600	200	3	3	1	
GENERAL TECHNICAL INFORMATION						
Size of conductor						
composition of conductor	Min. / Max. value	No. of conductor per terminal		Cross section (mm ²) or (AWG/kcmil)	Material of the wire	
Solid wire	Min.	1		6mm ²	Copper	
Flexible wire	Max.	1		70mm ²	Copper	
Flexible wire	Min.	1		16mm ²	Copper	
Flexible wire	Max.	1		AWG 2/0	Copper	
Single-core or stranded wire	Max.	1		95mm ²	Copper	
Single-core or stranded wire	Max.	1		AWG 3/0	Copper	
Flexible wire with sleeve	Max.	1		70mm ²	Copper	
Flexible wire with ferrule according to DIN 46228	Min.	1		10mm ²	Copper	
Stripping length						
Length (mm) -						
						
Recommended screw driver						
Type of screw driver	Value					
Hex key	5					
Tightening torque of screws						
			tightening torque (Nm)	tightening torque (lb-in)		
			14	125		
Approbations						
Specification						Marking
EAC						
CE marking						
UK Directives						
UL 60947-4-1; CSA C22.2 No. 60947-4-1						
CSA C.22.2 No.14						
GB/T14048.3						

General Information
Text

- Use only copper wires with or without tinned/silver-plated individual wires. Soldering the end of the wire before wiring is not allowed.
- EMC Note: This device is suitable for use in environment A and B.
- Terminals with factory fitted jumper links are tightened during production for loss prevention. When opening the terminal clamps, make sure that no factory fitted links get lost and that all wire connections are properly seated.
- After wiring, ALL terminal screws must be tightened to the specified torque values.
- The protection class of the selected mounting type may vary if optional extras are used.
- Do not lubricate or treat contacts.
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.

Waste Electrical & Electronic Equipment (WEEE)
Picture name
Description


Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com


Proposition 65
Picture name
Description


WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver


Classification Terminal: Screw terminal

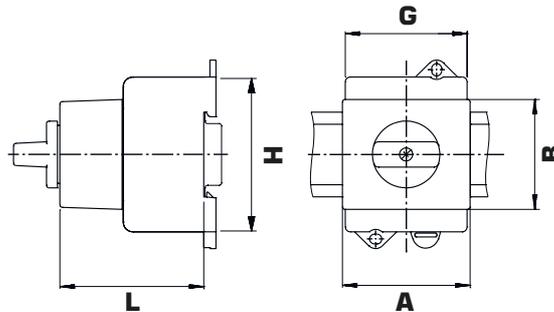Mounting-VE2


IP - Code front side	IP40
Stages	2,00 - 3,00
A	H 112,00 mm
B	H 45,00 mm
G	H 112,00 mm
H	H 108,00 mm
L	H 98,00 mm


Wiring diagram

KG160.T303.VE2

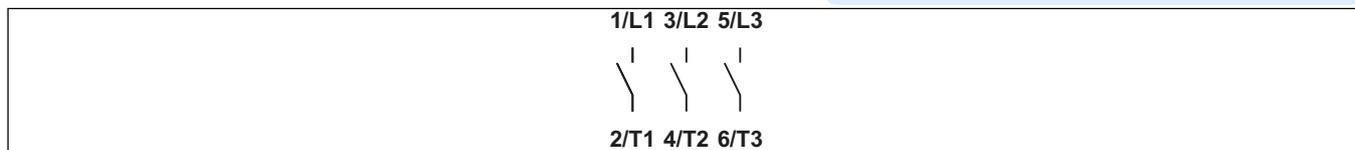


Face plate

K3.F556/C10.VE2

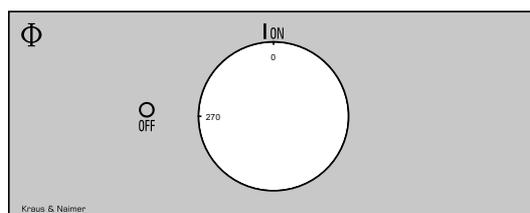



Sample image

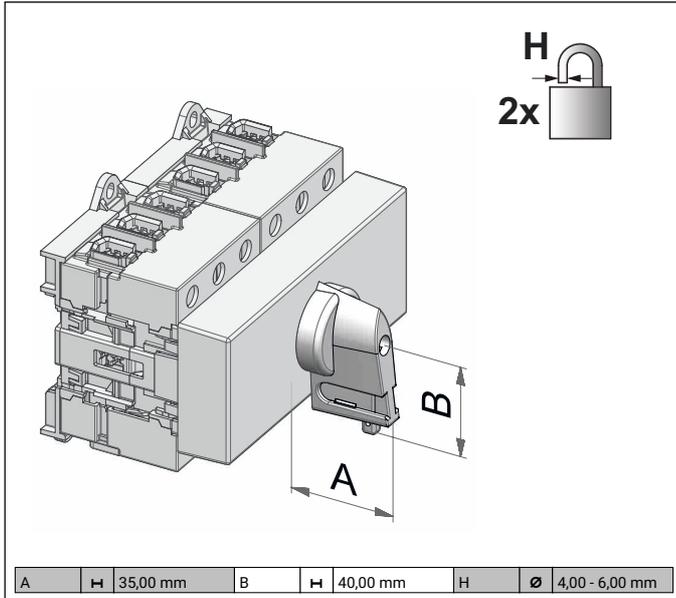

PADLOCK DEVICE

with type F-handle (locking direction at right angle to the shaft) for type of mounting KS (S00), KS (S0), KL (S0, S1, S2), PF, PFC, PFF, PN, VE2, VE21

Designation: S1.V840A/E2D

Lock bow diameter: "E" for lock bow diameter 4-6mm

Color of handle: "2" red, locking bar flag yellow

Type of mounting: "D" for type of mounting VE2 for switch type KG125-KG162