

MINAS LIQI Servo Drive to FP Series PLC (PNP output type)


NB. The COM of input in plc side must to be connect to 24 VDC

Other input signals available:

| | | |
|----------|---------|----------|
| GAIN | -TL_SEL | -VS_SEL1 |
| -VS_SEL2 | DIV1 | DIV2 |
| -ESTOP | | |

Other output signals available:

| | | |
|----------|----------|--------|
| -BRK-OFF | -TLC | -ZSP |
| -WARN1 | -WARN2 | -P-CMD |
| -INP2 | -ALM-ATB | -P-ON |

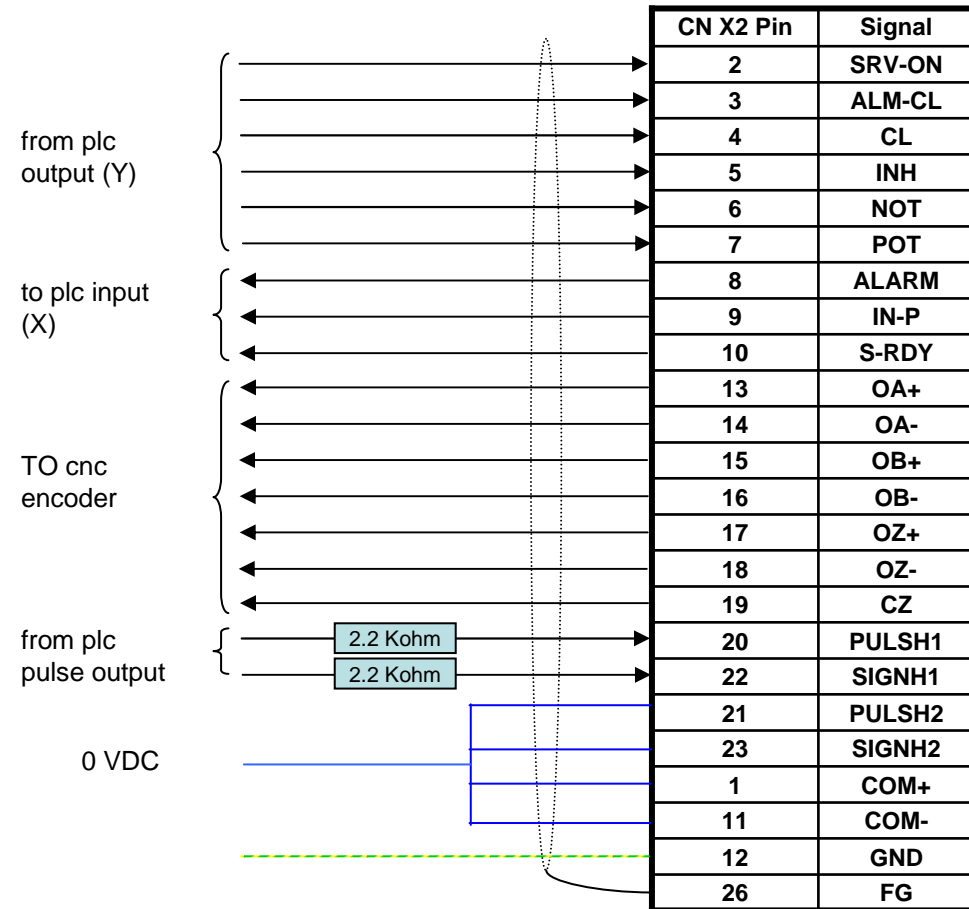

MINAS LIQI Servo Drive to FP Series PLC (NPN output type)

NB. The COM of input in plc side must to be connect to 24 VDC

Other input signals available:

| | | |
|----------|---------|----------|
| GAIN | -TL_SEL | -VS_SEL1 |
| -VS_SEL2 | DIV1 | DIV2 |
| -ESTOP | | |

Other output signals available:

| | | |
|----------|----------|--------|
| -BRK-OFF | -TLC | -ZSP |
| -WARN1 | -WARN2 | -P-CMD |
| -INP2 | -ALM-ATB | -P-ON |

