

- For the 22.5 mm control panel programme
- Low current consumption
- High protection rating IP 65



i TECHNICAL SPECIFICATIONS:

Dimensions (Ø x Depth):	28 mm x 12 mm (Protrusion from panel)
Housing:	PA fibreglass, high-impact
Tone frequency:	c. 2,400 Hz / c. 3,200 Hz (12 V)
Tone type:	Continuous tone or pulse tone with approx. 1 Hz
Fixing:	Installation mounting for Ø 22.5 mm (M 22)
Connection:	Connector plug with screw terminal max. 1.5 mm ²
Life duration:	> 5,000 hrs

🛒 ORDER SPECIFICATIONS:

Voltage	12 V=	24 V~	115 V~	230 V~
Current Consumpt.	≤ 10 mA	≤ 8 mA	≤ 8 mA	≤ 8 mA
Continuous tone	107 000 54	107 000 75	107 000 77	107 000 68
Pulse tone	107 010 54	107 010 75	107 010 77	107 010 68


(12 V = / **107 000 54** and **107 010 54** without CSA and UL approval)

📐 TECHNICAL DIAGRAMS:

see page 266



Simple connection by means of connector plug

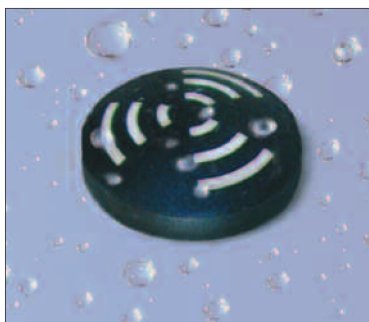

High protection rating IP 65 for use in rough conditions

