

Electromechanical Audible Signal Devices / Alarm Bell

Bell continuous tone 24VDC GY

Part No.: 914.052.55

**MECHANICAL DATA**

Height	76 mm
Diameter	167 mm
Materials	Steel
Housing colour	Grey
Protection category	IP66
Connection	Screw terminals
cross-sectional area maximum	1,50mm ² / 16AWG
Cable entry	Screwed cable gland
Cable entry minimum	d = 5 mm
Cable entry maximum	d = 9 mm
Tension relief	Present (conforms to VDI)
Type of fixing	Wall mounting
Service life optical	200 h minimum
Acoustic service life	200 h minimum
Working temperature minimum	-30°C
Working temperature maximum	+50°C
Weight with packaging	1520 g
Product weight	1450 g

ELECTRICAL DATA

Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	300 mA
Rated inrush current	1.000 mA
Protection class	Protection class 2
Pollution degree	3

ACUSTICAL DATA

Volume/dB(max) at 1m distance	98,0 dB dB(A)
Acoustic signal image	Continuous tone




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Electromechanical Audible Signal Devices / Alarm Bell

Bell continuous tone 24VDC GY

DRAWING

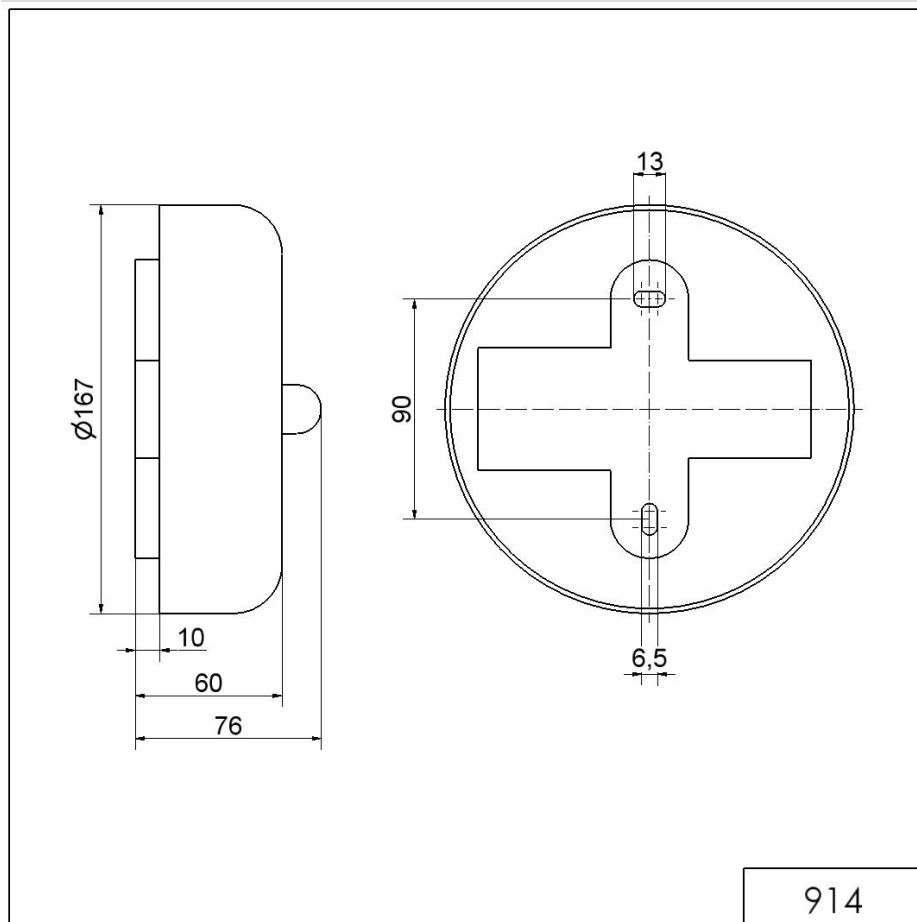

914



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.