


**PRODUCT DESCRIPTION:**

**AP\_T43**

**PRODUCT CODE:**

**AP5T43W03P**

**DYNAMIC 3D VIEW:**

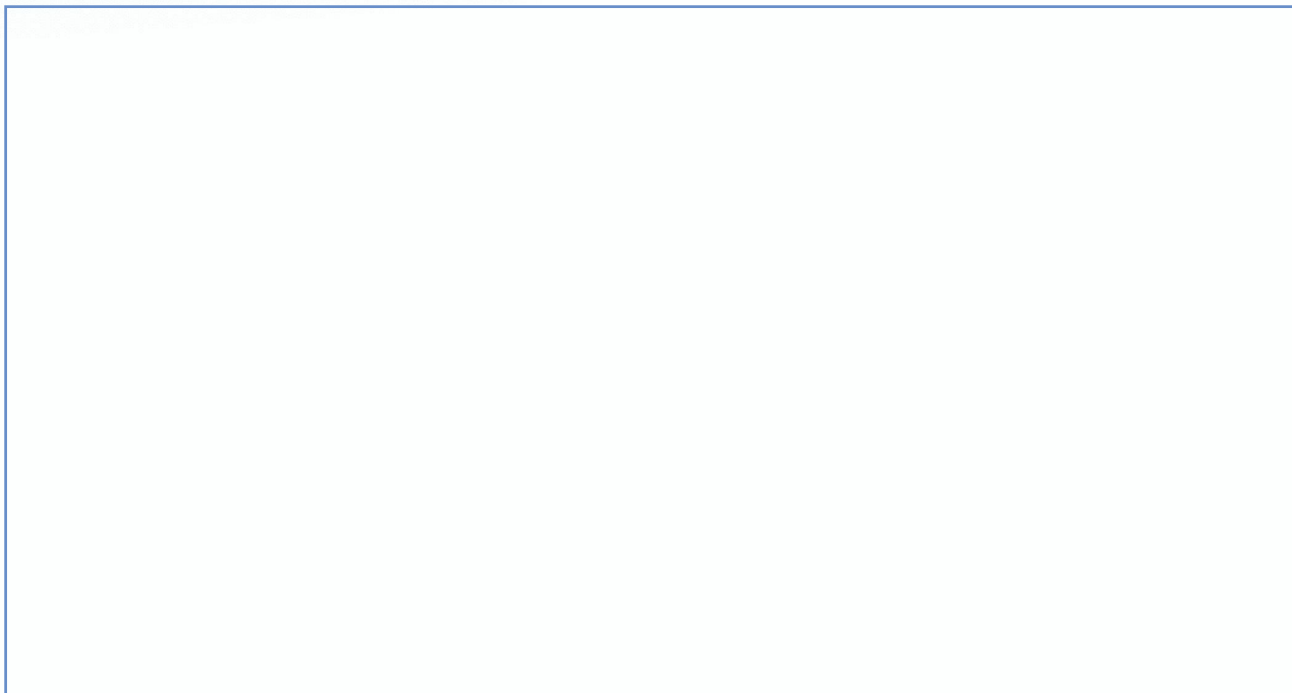

**STATIC 3D VIEW:**



Datasheet creation date: 19/08/2025 12:26



tel. +39 039 9906408  
+39 039 9903468  
fax +39 039 9906203




Via Novarino 9/L  
23899 Robbiate (LC)  
ITALY



[www.comepi.it](http://www.comepi.it)  
[comepi@comepi.it](mailto:comepi@comepi.it)  
[tecnico@comepi.it](mailto:tecnico@comepi.it)

### TECHNICAL VIEW:

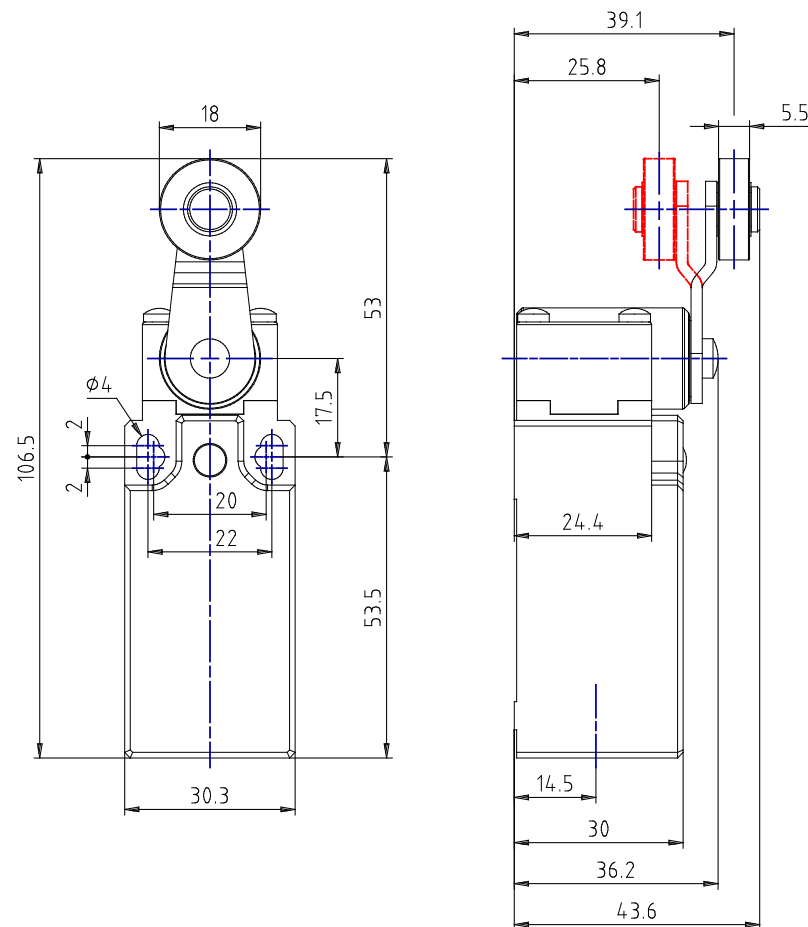

Datasheet creation date: 19/08/2025 12:26



tel. +39 039 9906408  
+39 039 9903468  
fax +39 039 9906203



Via Novarino 9/L  
23899 Robbiate (LC)  
ITALY



www.comepi.it  
comepi@comepi.it  
tecnico@comepi.it

## DETAILS:

|                                                                         |                                            |
|-------------------------------------------------------------------------|--------------------------------------------|
| Part Number                                                             | AP5T43W03P                                 |
| Casing Material                                                         | Reinforced thermoplastic                   |
| Width [mm]                                                              | 30                                         |
| Electrical connections                                                  | One cable inlet for M20x1.5 cable gland    |
| IP protection rating                                                    | IP65                                       |
| Actuating Head                                                          | Steel roller lever (ø 18mm)                |
| Head Material                                                           | Thermoplastic head                         |
| Microswitch                                                             | Slow action contacts ( 3NC )               |
| Approvals                                                               | IMQ - cULus - CCC - EAC                    |
| Reference Directives                                                    | LVD - 2014/35/EU                           |
| Reference Standards                                                     | IEC 60947-5-1 / EN 60947-5-1               |
| Operating Temperatures [°C]                                             | -25°C ... +70°C                            |
| Stock temperature [°C]                                                  | -30°C ... +80°C                            |
| Protection against electric shocks [Classe (secondo IEC 60536)]         | Class II - Double insulation               |
| Rated insulation voltage UI [V]                                         | 400                                        |
| Pollution Degree                                                        | 3                                          |
| Contact rating according to UL50                                        | A300 - Q300                                |
| Rated Impulsive Voltage Uimp [kV]                                       | 6                                          |
| Conventional thermal current in free air Ith [A (θ                      | 10                                         |
| Short circuit protection [A (Ue                                         | 10                                         |
| Rated Operational Current Ie - AC-15 (50-60 Hz) [Secondo IEC 60947-5-1] | 24V - 10A / 120V - 6A / 400V - 4A          |
| DC-13 operating currents [Secondo IEC 60947-5-1]                        | 24V - 6A / 125V - 0.55A / 250V - 0.4A      |
| Switching Frequency [Cicli/ora]                                         | 3600                                       |
| Resistance Between Contacts [mΩ]                                        | 25                                         |
| Connecting Terminals                                                    | M3 screw with cable clamp (+,-) pozidriv 2 |
| Connecting Cables Dimensions [mm²]                                      | 0.34 ... 1.5                               |
| Protective Conductor Terminal                                           | /                                          |
| Marking Terminals                                                       | According to IEC 60947-5-1                 |
| Mechanical Durability [Milioni di manovre]                              | 10                                         |
| B10d [Milioni di manovre]                                               | 20                                         |

### PRODUCT DRAWING RELEASE:

Datasheet creation date: 19/08/2025 12:26

Last Modification (geometry): 16/12/2024 16:29



tel. +39 039 9906408  
+39 039 9903468  
fax +39 039 9906203



Via Novarino 9/L  
23899 Robbiate (LC)  
ITALY



www.comepi.it  
comepi@comepi.it  
tecnico@comepi.it