

PRODUCT DESCRIPTION:

BP_H11


PRODUCT CODE:

BP5H11X12

DYNAMIC 3D VIEW:



STATIC 3D VIEW:

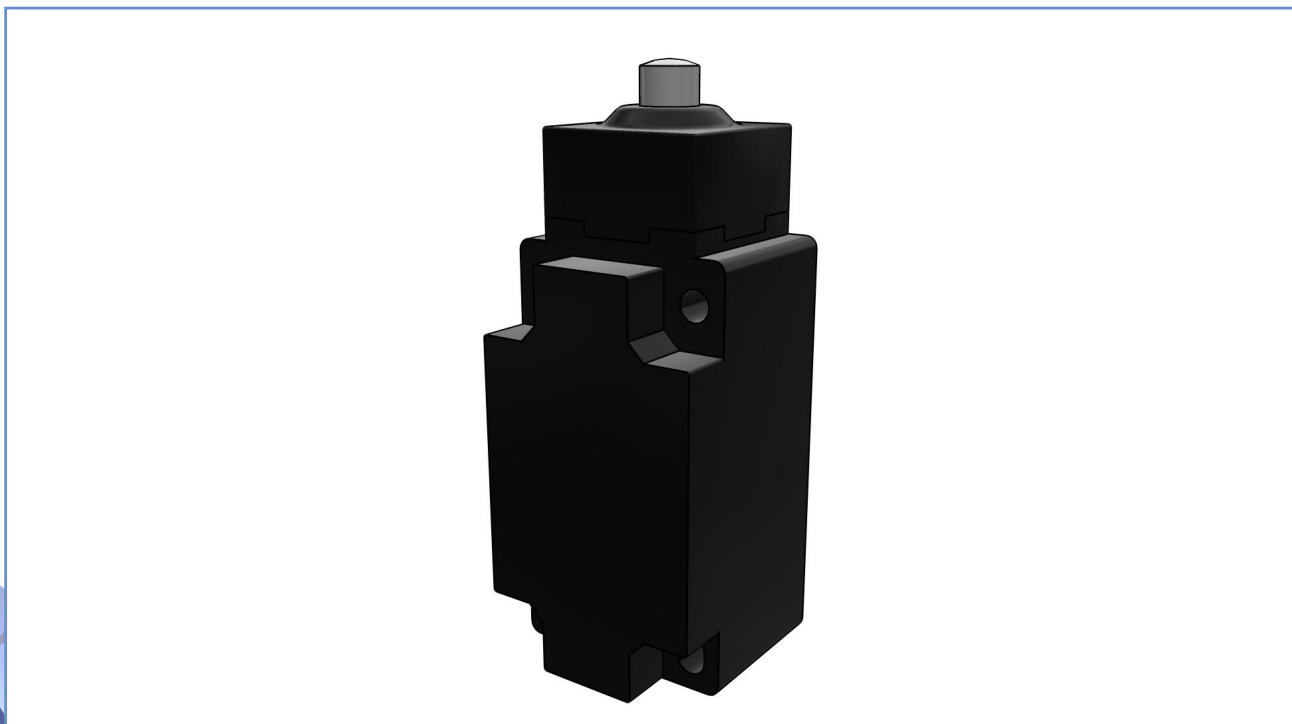

Datasheet creation date: 19/08/2025 11:46



tel. +39 039 9906408
+39 039 9903468
fax +39 039 9906203




Via Novarino 9/L
23899 Robbiate (LC)
ITALY



www.comepi.it
comepi@comepi.it
tecnico@comepi.it

TECHNICAL VIEW:

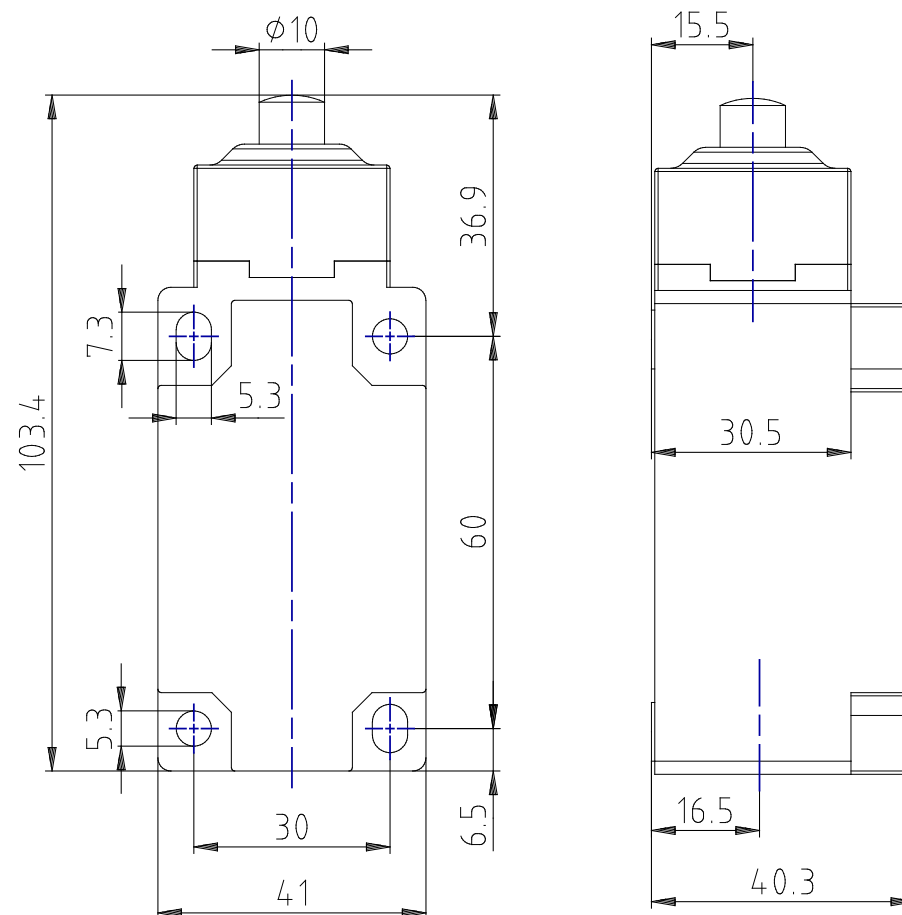

X12	31	21	13	0	0.9	2.4	2.6	5.9mm
								
	32	22	14	31-32	21-22	13-14	0	0.9
								

Datasheet creation date: 19/08/2025 11:46



tel. +39 039 9906408
+39 039 9903468
fax +39 039 9906203



Via Novarino 9/L
23899 Robbiate (LC)
ITALY



www.comepi.it
comepi@comepi.it
tecnico@comepi.it

DETAILS:

Part Number	BP5H11X12
Casing Material	Reinforced thermoplastic
Width [mm]	40
Electrical connections	One cable inlet for M20x1.5 cable gland
IP protection rating	IP65 - IP67
Actuating Head	Plain plunger
Head Material	Thermoplastic head
Microswitch	Non-overlapping slow action contacts (1NO + 2NC)
Approvals	IMQ - cULus - CCC - CSA - EAC
Reference Directives	LVD - 2014/35/EU
Reference Standards	IEC 60947-5-1 / EN 60947-5-1
Operating Temperatures [°C]	-25°C ... +70°C
Stock temperature [°C]	-30°C ... +80°C
Protection against electric shocks (according to IEC 60536) [Class]	Class II - Double insulation
Rated insulation voltage UI [V]	500
Pollution Degree	3
Contact rating according to UL50	A600 - Q600
Rated Impulsive Voltage Uimp [kV]	6
Conventional thermal current in air free Ith (θ min 40 ° C) [A]	10
Short circuit protection (EU min 500Vac - fuses type gG (gl)) [A]	10
Operating currents Ie - AC-15 (50-60 Hz) According to IEC 60947-5-1	24V - 10A / 400V - 1.8A
Operating currents DC-13 According to IEC 60947-5-1	24V - 2.8A / 125V - 0.55A / 250V - 0.27A
Switching Frequency [cycles/hour]	3600
Resistance Between Contacts [mΩ]	25
Connecting Terminals	M3 screw with cable clamp (+,-) pozidriv 2
Connecting Cables Dimensions [mm²]	0.34 ... 1.5
Protective Conductor Terminal	/
Marking Terminals	According to IEC 60947-5-1

PRODUCT DRAWING RELEASE:

Datasheet creation date: 19/08/2025 11:46

Last Modification (geometry): 16/12/2024 16:30


 tel. +39 039 9906408
 +39 039 9903468
 fax +39 039 9906203

 Via Novarino 9/L
 23899 Robbiate (LC)
 ITALY

 www.comepi.it
 comepi@comepi.it
 tecnico@comepi.it

DETAILS:

Mechanical Durability [Millions of Operations]	25
B10d [Millions of Operations]	50

PRODUCT DRAWING RELEASE:

Datasheet creation date: 19/08/2025 11:46

Last Modification (geometry): 16/12/2024 16:30

tel. +39 039 9906408
+39 039 9903468
fax +39 039 9906203Via Novarino 9/L
23899 Robbiate (LC)
ITALYwww.comepi.it
comepi@comepi.it
tecnico@comepi.it