


Single-phase switching power supply 120-230 Vac output power 240 W

- Single-phase input 120 and 230 Vac
- Short circuit, overload, over temperature, input and output overvoltage protections
- High outrush current to guarantee downstream overcurrent protections selectivity and to start-up heavy loads
- Failure contact for Uout -10%
- Compact dimensions
- Suitable for applications in SELV and PELV circuits

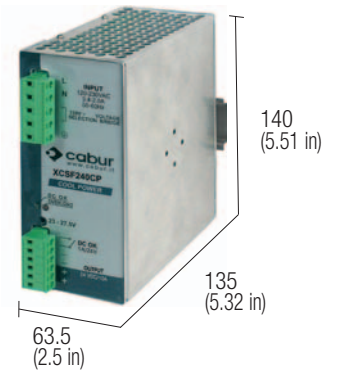


NOTES

The depth dimension includes the terminal blocks and the DIN clamp.

- (2) Double input selectable with external jumper, DC supply allow only between 300 and 345 Vdc
- (3) Over 45°C (113°F) apply a derating: -0.17 A/°C for version C, CP and CPH; -0.27 A/°C for version B; -0.08 A/°C for version DP;
- (4) For this peak current, the output voltage does not drop more than 10% of the nominal value, but the current value, provided by the power supply also depends on the total line resistance.
- (5) Only on version CSF240CP, for orders, adds the letter H to the code (XCSF240CPH)

BLOCK DIAGRAM

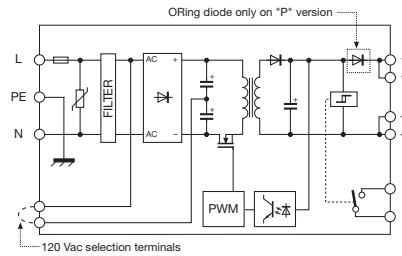

Special version for DC motors

VERSIONS	Cod. XCSF240C	Cod. XCSF240CP	Cod. XCSF240B	XCSF240DP
Output 24 Vdc 10 A	CSF240C			
Output 24 Vdc 10 A redundant version		CSF240CP		
Output 12...15 Vdc 16 A			CSF240B	
Output 48 Vdc 5 A redundant version				CSF240DP
INPUT TECHNICAL DATA	120 - 230 Vac (range 90...132 Vac / 185...264 Vac / 300...345 Vdc) (2)			
Input rated voltage	47...63 Hz			
Frequency	3.5 A / 1.8 A ± 10%			
Current @ nominal lout (Uin 120 / 230 Vac)	< 35 A			
Current @ nominal lout (Uin 120 / 230 Vac)	> 0.6			
Current @ nominal lout (Uin 120 / 230 Vac)	T 6.3 A replaceable			
Current @ nominal lout (Uin 120 / 230 Vac)	circuit breaker: 10 A - C characteristic - fuse: T 10 A			
OUTPUT TECHNICAL DATA	24 Vdc	12...15 Vdc	12...15 Vdc	48 Vdc
Output rated voltage	23...27.5 Vdc	12...15 Vdc	12...15 Vdc	45...55 Vdc
Output adjustable range	10 A @ 45°C (3)	16 A @ 45°C (3)	16 A @ 45°C (3)	5 A @ 45°C (3)
Output adjustable range	15 A for >30 s	24 A for >30 s	24 A for >30 s	7.5 A for >30 s
Continuous current	with Uout >90% Un (4)	with Uout >90% Un (4)	with Uout >90% Un (4)	with Uout >90% Un (4)
Continuous current	>25 A for 400 ms (4)	>25 A for 400 ms (4)	>25 A for 400 ms (4)	>25 A for 400 ms (4)
Overload limit	< 1%	< 1%	< 1%	< 1%
Short circuit peak current	≤ 50 mVpp	≤ 50 mVpp	≤ 50 mVpp	≤ 50 mVpp
Load regulation	>30 ms / >60 ms	>30 ms / >60 ms	>30 ms / >60 ms	>30 ms / >60 ms
Ripple @ nominal ratings	hiccup at the overload limit with auto reset / over temperature protection			
Hold up time @ In (Uin 120 / 230 Vac)	"DC OK" green LED / "DC OK" alarm contact/ "Overload" red LED			
Overload / short circuit protections	21.6 Vdc	10.8 Vdc	10.8 Vdc	43.2 Vdc
Status display	possible	possible	possible	possible
Alarm contact threshold	possible with external ORing diode	factory provided with internal ORing diode	possible with external ORing diode	factory provided with internal ORing diode
Parallel connection	possible with external ORing diode			
Redundant parallel connection	factory provided with internal ORing diode			
GENERAL TECHNICAL DATA	>88% / >90%			
Efficiency (Uin 120 / 230 Vac)	>85% / >85%			
Dissipated power (Uin 120 / 230 Vac)	>89% / >89%			
Dissipated power (Uin 120 / 230 Vac)	32 W / 27 W			
Operating temperature range	42 W / 42 W			
Operating temperature range	28 W / 28 W			
Input/output isolation	-20...+60°C, with derating over 45°C / over temperature protection (3)			
Input/output isolation	3 kVac / 60 s SELV output			
Input/ground isolation	1.5 kVac / 60 s			
Output/ground isolation	0.5 kVac / 60 s			
Standard/approvals	EN50178, EN61558, EN60950, IEC950, UL508, UL60950			
EMC Standards	EN61000-6-2, EN61000-6-4, EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-11			
MTBF @ 25°C @ nominal ratings	>500'000 h acc. to SN 29500 / >150'000 h acc. to MIL Std. HDBK 217F			
Overvoltage category/Pollution degree	II / 3			
Protection degree	IP 20 IEC 529, EN60529			
Connection terminal	2.5 mm² pluggable screw type			
Housing material	aluminium			
Approx. weight	920 g (32.48 oz)			
Mounting information	vertical on rail, allow 10 mm spacing between adjacent components			
MOUNTING ACCESSORIES	PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB			
Mounting rail type according to IEC60715/TH35-7.5	—			
Mounting rail type according to IEC60715/G32	—			