


WALL-MOUNTED ENCLOSURE COMPLIANT
WITH HYGIENIC CERTIFICATION
EKO HYGIENIC

AISI 304L stainless steel wall-mounted enclosure with undrilled door and internal hinges.
FeZn internal plate, thickness: 25/10.
Top inclined at 30°. Back completely flat and free from interstices. Designed to make cleaning easier and prevent residue build-ups. Inner rim fitted with an internal drip guard. Latest-generation, stainless steel hygienic hinges, with outer seal.



Key	Design specifications
A - Internal plate width	Door drilling reference: 70 mm offset around the perimeter Back drilling reference: 10 mm offset around the perimeter Side drilling reference: 10 mm offset around the perimeter Internal plate: L - 70 mm, H1 - 70 mm If two door-leaves with welded uprights are to be fitted, there will be two separate plates, each measuring L - 70 mm H1 - 70 mm
B - Internal plate height	
C - Centre-to-centre width for securing the internal plate	
D - Centre-to-centre height for securing the internal plate	
E - Drilling width	
F - Drilling height	
G - Internal reference	
H, H1, H2 - Height	
L - Width	
P - Depth	

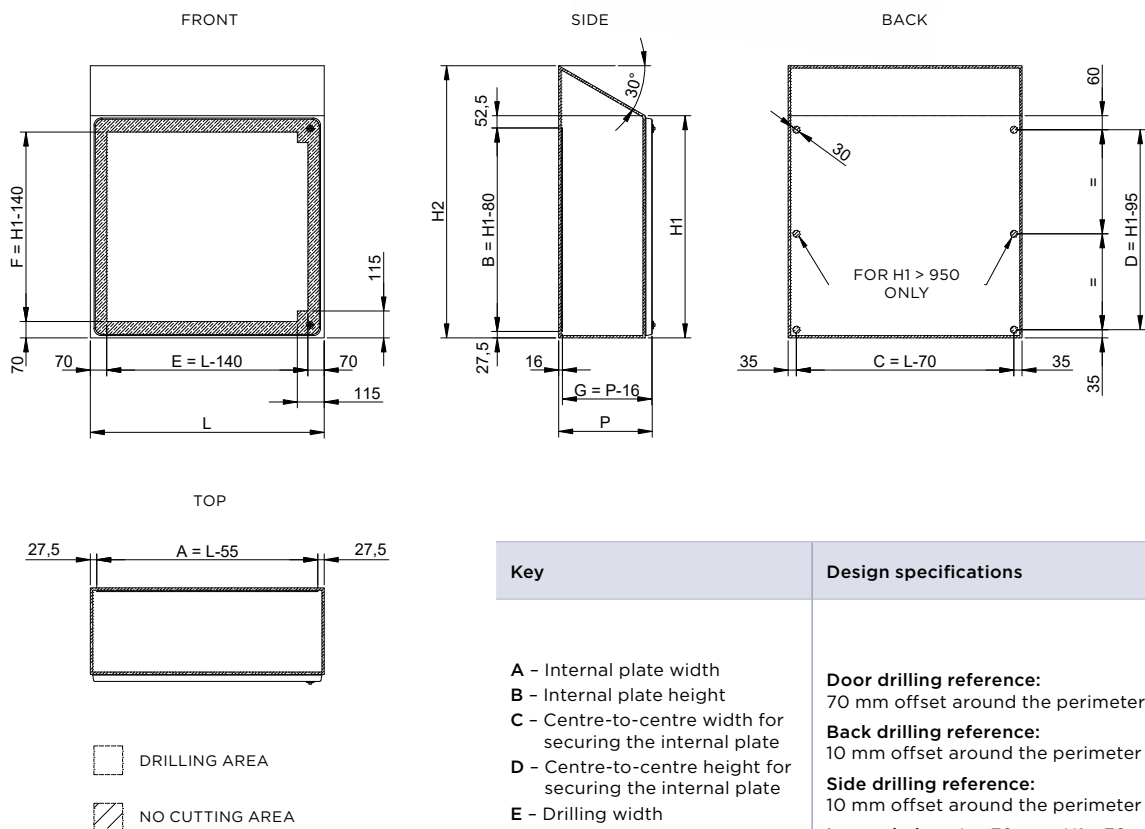

BASIC CONFIGURATION

Item code	No. of Doors	Basic dimensions (mm)			Express Warehouse*
		Width	Height	Depth	
OH0200300150001	Single door	200	300	150	x
OH0380450210001	Single door	380	450	210	x
OH0380450300001	Single door	380	450	300	
OH0380600210001	Single door	380	600	210	x
OH0500600210001	Single door	500	600	210	x
OH0600450300001	Single door	600	450	300	x
OH0600600210001	Single door	600	600	210	x
OH0600800300001	Single door	600	800	300	x
OH0800500300001	Single door	800	500	300	x
OH0800800300002	Single door	800	800	300	x
OH0801000300002	Single door	800	1000	300	
OH0801200300002	Single door	800	1200	300	x

*Items available in stock in the solid version

TECHNICAL DESCRIPTION

Type of steel	AISI 304L Scotch-Brite
Cover	Thickness: 1.5 mm
Door	Hinged on the left 115° opening Thickness: 2 mm 1/4-turn hygienic stainless steel lock
Seal	FDA-approved silicone
Incline	Top inclined at 30°

CUSTOMISATION OPTIONS

Material	AISI 316L
Minimum dimensions (W x H1 x D)	Single door: 200 x 300 x 150 mm Double door with welded frame 600 x 300 x 150 mm
Maximum dimensions (W x H1 x D)	Single door: 800 x 1200 x 400 mm Double door with welded frame: 1400 x 1200 x 400 mm
Dimensional pitch	10 mm (L/H), only six depths available: 150, 210, 250, 300, 350 and 400 mm
Holes and rear fastenings	Drill holes for fitting hygienic spacers marked out
Door	Hinged on the right
Incline	Other slopes available on request
Internal plate	A304L/A316L, 1.5 mm thick

*Check the drawings for drilling references

CERTIFICATIONS

As standard	CE - IP66 - IP69K - UKCA - UL/CSA (Type 1,2,4,4X) - IK10
On request	3-A - Atex 2GD - Atex 3GD - IECEx

Product accessories

/ HYGIENIC wall spacers

See the accessories section to discover all the other accessories available.




HYGIENIC LINE

FEET

HYGIENIC FEET

hygienic M20 stainless steel AISI 304L feet, Ø 80mm diameter.

Code	Description
013707500	Kit with 4 hygienic M20 Ø 80 feet made from AISI 304L stainless steel. With 1 floor mounting point, 15 mm diameter

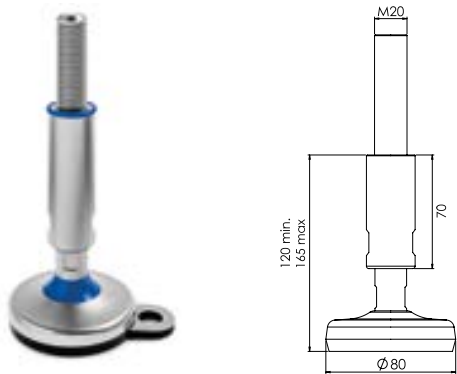

SPACERS

HYGIENIC SPACERS

Hygienic stainless steel AISI 304L spacers, with FDA-approved double silicone seal. Available as a kit containing 1 x 3-A spacer (H = 51 or H = 102), depending on the electrical enclosure size, to space them out as required and clean and sanitize the enclosure. For their correct installation, please refer to the technical installation manual.

Code	Description
013702610	ADH HYGIENIC spacer H = 51 mm
013702611	ADH HYGIENIC spacer H = 102 mm
013702620	EKO HYGIENIC spacer H = 51 mm
013702621	EKO HYGIENIC spacer H = 102 mm

These can only be applied to products after drilling a hole in the product back.



Always specify any accessories at the quotation and order stages.

CLOSING SYSTEMS

CLOSING SYSTEMS


Code	Description
013707928	AISI 316L stainless steel hexagonal lock with right hygienic key-way
013707929	AISI 316L stainless steel hexagonal lock with left hygienic key-way



FOR HYGIENIC LOCK KEYS

IRINOX key for hygienic zamak locks. With its ergonomic handle, it allows greater pressure to be applied, making them easier to open.

Code	Description
013706711	HYGIENIC lock keys

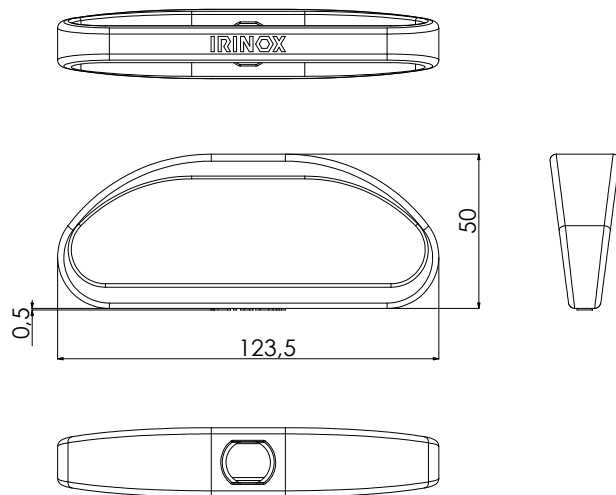

Always specify any accessories at the quotation and order stages.