



**Kisling AG**  
**Motorenstrasse 102**  
**CH-8620 Wetzikon**

Telefon +41 (0)58 272 01 01  
Telefax +41 (0)58 272 01 03

info@kisling.com  
www.kisling.com

## TECHNICAL DATA SHEET Ergo Primer 5150

### Description

The PRIMER 5150 is a solvent based product, developed to treat nonpolar surfaces like polyethylene, polypropylene or PTFE, so that these materials can be bonded with ergo cyanoacrylates.

The use of ergo PRIMER 5150 will give excellent strength on a wide range of difficult plastics

### How to use the ergo PRIMER 5150

The PRIMER can be applied by using a soaked gauze or by a brush.

Scrub lightly two or three times over the surface and let evaporate the solvent.


If only one part should consist out of nonpolar material, please treat only the difficult surface.

Apply the glue on the untreated surface

Apply the adhesive within the next 20 minutes and fit the parts together.

### **ergo 5400 on various plastics**

tensile shear strength acc. to DIN EN 1465

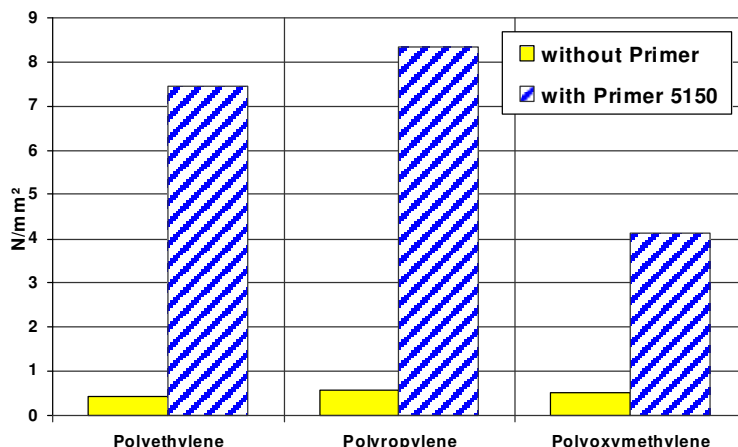

### Physical Properties (liquid product)

Chemical Base:	aliphatic solvent
Colour:	clear/ colourless
Viscosity:	< 20 mPas
Density:	0,68 g/cm³
Flashpoint:	-10 °C
Shelf Life:	12 month at room temperature

### **WARRANTY INFORMATION - PLEASE READ CAREFULLY**

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that KISLING products are safe, effective, and fully satisfactory for the intended end use. KISLING sole warranty is that the product will meet the KISLING sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. KISLING specifically disclaims any other express or implied warranty of fitness for a particular purpose or merchantability. Unless KISLING provides you with a specific, duly signed endorsement of fitness for use, KISLING disclaims liability for any incidental or consequential damages. Suggestions of uses should not be taken as inducements to infringe any particular patent.

LK/ 14.12.2007/ 5150e