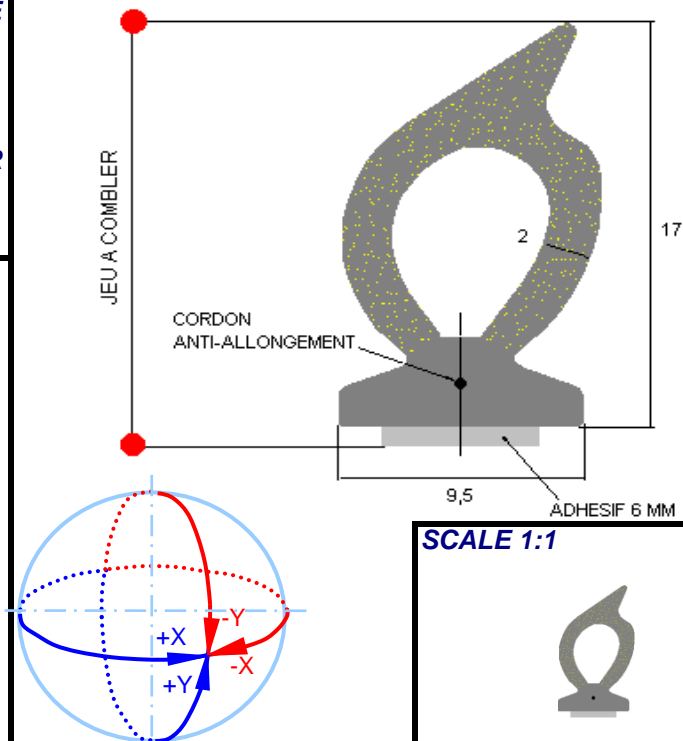


	<p><b>PRODUCT NAME</b> <b>MF17+</b></p> <p><b>ITEM NUMBER</b> <b>60443</b></p>	
<p><b>PRODUCT PICTURE</b></p> 		<p><b>SCALE 1:1</b></p> 

**PRODUCT DESCRIPTION**

**Cellular Rubber** : gives flexibility when collapsed  
**Flipper** : to ensure tightness when variation of gap  
**Rigid foot** : maintains the geometry of the profile  
**Strong adhesive** : allows a good holding without mechanical fixing

<b>MATERIAL</b>	FOOT	Grade :	Black EPDM
		Hardness :	70 Shores A
	TUBING	Grade :	black cellular rubber

<b>MAXIMAL TEMPERATURES OF USE OF THE PROFILE (°C)</b>		
Nonstop Static 80	Nonstop under constraints 70	Hottest ( max duration 30 min) 110

<b>ADHESIVE</b>		
Peeling Behaviour at 90° 10 N/cm minimum	Pull out Behaviour 40 N/cm <sup>2</sup>	Temperature of use from -30°C to +90°C

<b>MINIMAL BENDING RADIUS (mm)</b>			
X	Limit	Y	Limit
+20	Foot unsticking	+80	wavy flipper
-20	Foot unsticking	-70	tubing collapse

<b>GAP - Direction Y - (mm)</b>				
		<b>MINI</b>	<b>ADVISED</b>	<b>MAXI</b>
Gap		<b>8</b>	<b>11      14</b>	<b>18</b>
Tubing collapse		<b>100%</b>	<b>50%      30%</b>	<b>0%</b>

For all inquiries feel free to contact : HUTCHINSON - Le Pommarin - BP 17 - 38430 MOIRANS  
 Tel. +33 4 76 35 79 00 - Fax +33 4 76 35 79 09

