


HALOGEN FREE WIRING DUCT



The Halogen Free Wiring Duct is manufactured from Noryl NH 5110E and in case of fire does not emit any halogenated toxic fumes. For this reason the Halogen Free Wiring Duct is particularly suitable for installation in railway stations, airports, public buildings, hospitals, subways, etc.

PRODUCT SPECIFICATIONS

Material:	Noryl non-halogenated, flame retardant, low smoke 5110E
Service temperature:	-25° C to 70° C
Flammability:	UL 94 V-1
Standards:	UL 1565 c  us
Oxygen Index:	34.0% (ISO 4589-2)
Color:	Light grey (RAL 7035)

The Halogen Free Standard Finger Wiring Duct (T1H) is currently available in select sizes as shown on back table indicated by a (*). Other sizes and Narrow Finger (T1EH) are only available by special request at this time.





IBOCO Part #	Size (w x h)	Size (millimeters)	Standard Carton (FT)
T1H-1020LG*	1 x 2	25 x 50	72
T1H-1030LG*	1 x 3	25 x 75	72
T1H-1515LG	1.5 x 1.5	37.5 x 37.5	72
T1H-1520LG*	1.5 x 2	37.5 x 50	72
T1H-1530LG	1.5 x 3	37.5 x 75	72
T1H-2020LG*	2 x 2	50 x 50	72
T1H-2030LG*	2 x 3	50 x 75	72
T1H-2040LG*	2 x 4	50 x 100	48
T1H-3020LG	3 x 2	75 x 50	72
T1H-3030LG*	3 x 3	75 x 75	48
T1H-3040LG*	3 x 4	75 x 100	24
T1H-4020LG	4 x 2	100 x 50	48
T1H-4030LG	4 x 3	100 x 75	48
T1H-4040LG	4 x 4	100 x 100	24

LG = LIGHT GREY RAL 7035

*CURRENTLY AVAILABLE




IBOCO Part #	Size (w x h)	Size (millimeters)	Standard Carton (FT)
T1EH-1515LG	1.5 x 1.5	37.5 x 37.5	72
T1EH-1520LG	1.5 x 2	37.5 x 50	72
T1EH-1530LG	1.5 x 3	37.5 x 75	72
T1EH-2020LG	2 x 2	37.5 x 50	72
T1EH-2030LG	2 x 3	50 x 75	72
T1EH-3020LG	3 x 2	75 x 50	72
T1EH-3030LG	3 x 3	75 x 75	48
T1EH-4020LG	4 x 2	100 x 50	48
T1EH-4030LG	4 x 3	100 x 75	48

LG = LIGHT GREY RAL 7035

T1H

HALOGEN FREE WIRING DUCT:
STANDARD FINGER

MEASUREMENTS

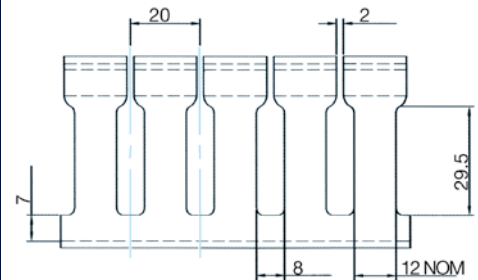

Color

Light grey RAL 7035

Standard Length

6 Feet 6 3/4 Inches


Standard Unit

Duct complete with cover

T1EH

HALOGEN FREE WIRING DUCT:
NARROW FINGER

MEASUREMENTS

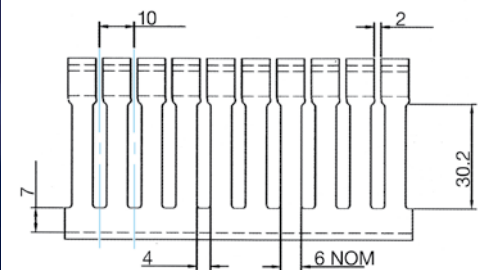

IBOCO Corporation
26 Northfield Avenue, Edison, NJ 08837
Tel. 732-417-0066 Fax 732-417-1166
email: iboco@iboco.com - website: www.iboco.com