



TMX

FAN ASSISTED PTC HEATERS

Super compact and light weight fan assisted heaters. Self-regulating PTC element. Touch safe. Spring terminal.




Features	Unit	TMX150.00	TMX150.10	TMX250.00	TMX250.10	TMX300.00	TMX300.10	TMX400.00	TMX400.10
Heating Capacity*	W	150	150	250	250	300	300	400	400
Power supply	V/Hz	230/50-60	115/50-60	230/50-60	115/50-60	230/50-60	115/50-60	230/50-60	115/50-60
Delayed fuse (advised)	A	6.3	10	6.3	10	6.3	10	6.3	10
Electrical connection	-	Spring terminals							
Protection class	-	Class II							
Protection degree EN60529	-	IP20							
Operating temperature	°C (°F)	-40/+70 (-40/+158)							
Storage temperature	°C (°F)	-40/+70 (-40/+158)							
Air flow rate	m ³ /h	30 (free flow)							
Mounting	-	Clip for mounting on DIN rail 35 mm EN50022							
Installation position	-	Best efficiency in vertical position							
Dimensions HxWxD	mm	88x66x97							
Weight (with packaging)	kg	0.36 (0.4)							
Conformity/Certifications	-	CE - UL US File n. E301228							

*at 20°C (68°F) ambient temperature

Accessories

Thermostat NC 0-60°C	THR2
Double thermostat NC 0-60°C NO 0-60°	THR22
Hygrothermostat 0-60°C 20-90%RH	ETUH22
Hygrostat 10-90%RH	MUH

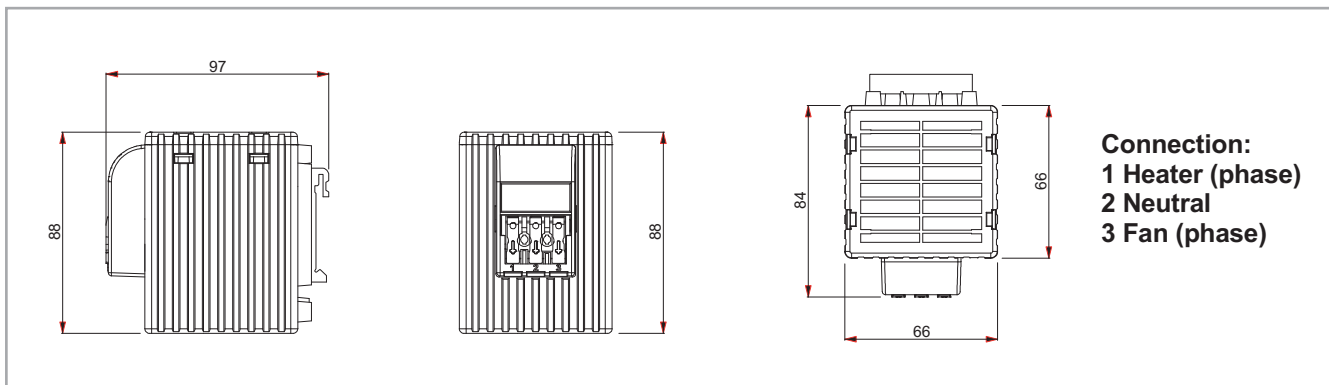

Specifications, values and drawings are subject to change without notice.