



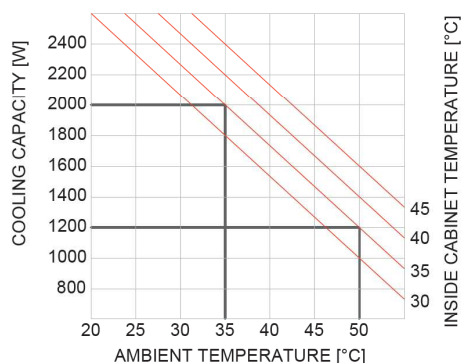

Air Conditioning 2000 W

AVE 200

WALL MOUNT AIR CONDITIONER FOR OUTDOOR APPLICATION

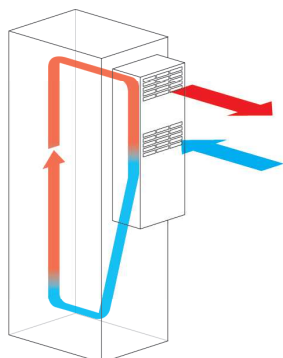


CONTROL TYPE			ARTICLE CODE		
Digital thermostat			AVE200.001	AVE200.011	AVE200.021
Digital thermostat with alarms			AVE200.002	AVE200.012	AVE200.022
Digital thermostat with alarms and RS485 port (ModBUS)			AVE200.003	AVE200.013	AVE200.023
FEATURES		Unit			
Power supply		V ph Hz	230 1 50/60	115 1 50/60	400 2 50/60
Cooling capacity EN14511	A35-A35	W	2000/2100		
	A35-A50	W	1200/1250		
Absorbed electric power EN14511	A35-A35	W	1060 /1100		
	A35-A50	W	1240/1300		
Rated current		A	6.6/6.9	13/13.8	3.3/3.5
Motor circuit breaker / Delayed pre fuse (advised)		A	10	16	10
Electrical connection		-	Three-pole connector		
Air flow rate (free blow)	enclosure	m3/h	600/625		
Operating temperature	ambient	°C (°F)	+5 +55 (+41/+ 131)		
	enclosure	°C (°F)	+20 +45 (+68/+ 113)		
Refrigerant		- g	R134a 450		
Condensate management		-	Condensate evaporator with safety overflow (not for entry level models .001/.011/.021)		
Protection degree EN60529/1	ambient	-	IP34		
	enclosure	-	IP54 (when installed on enclosure with the same protection degree)		
Design	casing	-	Galvanised sheet steel		
	cover	-	Galvanised sheet steel powder coated RAL7035		
Package Dimension H x W x D		mm	1070 x 460 x 265		
Weight (with packaging)		kg	49(50)	57(58)	57(58)
Conformity / Certifications		-	CE		

Versions

Stainless steel AISI304 cover	add 0X at code end
-------------------------------	--------------------

Accessories

Door limit switch	FINCOR
Door limit switch with mechanical lock	FINRIP
Flow diverter	FD200

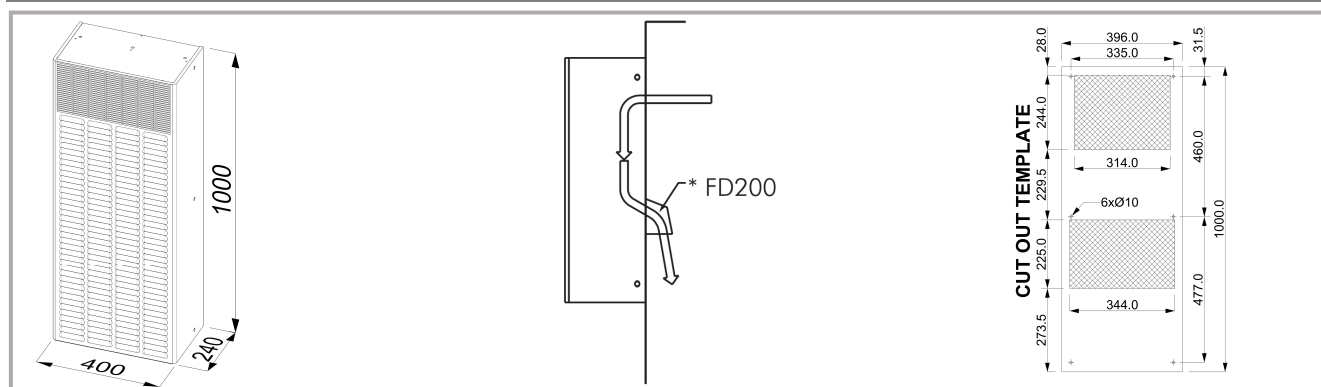

Specifications, values and drawings are subject to change without notice.