

KombiSIGN 71 / Audible Devices 645  
**Siren element 8 tne 24VAC/DC BK**



|                  |                     |
|------------------|---------------------|
| <b>Part No.:</b> | <b>645.890.75</b>   |
| <b>Series:</b>   | <b>KombiSIGN 71</b> |



| MECHANICAL DATA             |       |
|-----------------------------|-------|
| Height                      | 54 mm |
| Diameter                    | 70 mm |
| Materials                   | PC    |
| Housing colour              | Black |
| Protection category         | IP65  |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging       | 93 g  |
| Product weight              | 74 g  |

| ELECTRICAL DATA             |                    |
|-----------------------------|--------------------|
| Operating voltage           | 24V                |
| Operating voltage type      | AC/DC              |
| Operating voltage frequency | 50Hz               |
| Operating voltage tolerance | +/- 10%            |
| Rated operational voltage   | 24 VDC             |
| Rated operational current   | 30 mA              |
| Rated inrush current        | 250 mA             |
| Protection class            | Protection class 2 |
| Pollution degree            | 3                  |

| ACUSTICAL DATA              |                 |
|-----------------------------|-----------------|
| Volume (max) at 1m distance | 102,0 dB (A)    |
| Acoustic signal image       | Multi-tone      |
| Number of tones             | 8 tone          |
| Volume adjustable           | Switch          |
| Volume adjustment range     | 92 - 102 dB (A) |
| Acoustic service life       | 5,000 h minimum |

| APPROVAL DATA               |         |
|-----------------------------|---------|
| Conforms with CE            | Yes     |
| WEEE                        | Yes     |
| Conforms with RED directive | No      |
| Conform with ATEX-directive | No      |
| Conforms with CCC           | No      |
| Conforms with UL            | cULus   |
| UL Type Rating              | Type 12 |
| Conforms with FCC           | No      |
| Conforms with IC            | No      |

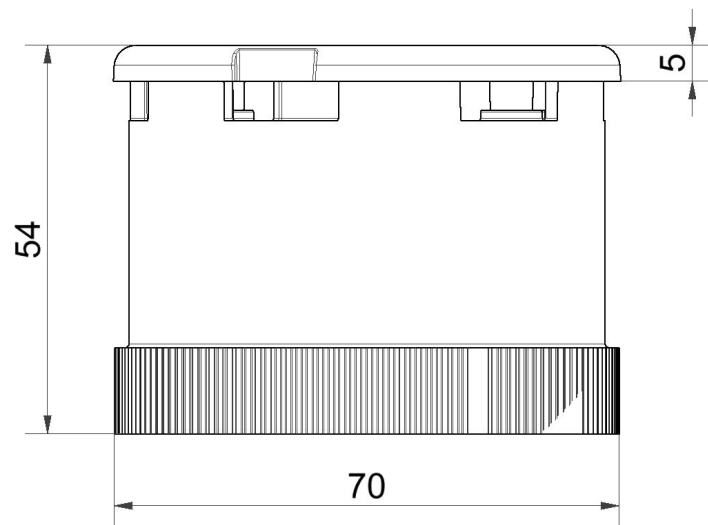


For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / Audible Devices 645

**Siren element 8 tne 24VAC/DC BK**

|                           |     |
|---------------------------|-----|
| EAC certificate available | Yes |
| Conforms with AS-I        | No  |
| ICAO Certification        | No  |
| Conforms with GL          | No  |
| Conforms with RoHS CN     | No  |
| Conforms with VdS         | No  |

**DRAWING**

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.