



ALFAB5



TIPS

The filter fan unit can be switched on by a thermostat that will power it only when the temperature exceeds a set threshold (e.g. 35°C). The fan works only when cooling is needed which saves energy, increases the life-time of the filter mat and reduce maintenance frequency.


Features	Unit	ALFAB000BPB	ALFAB500BPB	ALFAB510BPB	ALFAB524BPTB	ALFAB548BPTB
Air flow rate (free blow)	m ³ /h	-	110(120)		110	
Flow rate with exit filter	m ³ /h	-	80(92)		80	
Power supply	V/Hz	-	230/50-60	115/50-60	24DC	48DC
Dimensions HxWxD	mm	204x204x29	204x204x98			
Power consumption	W	-	22(21)		9	13
Current consumption	A	-	0.14(0.12)	0.26(0.24)	0.37	0.27
Overcurrent protection	-	-	impedance			
Electric connection	-	-	faston 2.8x0.5 mm		2-pole terminal 1.5 mm ²	
Duty cycle	-	-	100%			
Operating temperature	°C (°F)	-10/+70 (+14/+158)				
Protection degree/class	-	IP54	IP54/Class I			
Noise level	dB(A)	-	43(49)		45	
Flow direction	-	-	outside-in			
Bearing	-	-	ball			
Filter mat EN779	-	G3				
Service life (at 40°C)	hr	-	50 000			
Material	-	ABS UL94V-0 Color RAL7035				
Wall thickness	mm	1.2-2.4				
Gasket	-	self-adhesive				
Weight (with packaging)	kg	0.26(0.36)	1.00(1.20)		0.70(0.90)	
Package dimensions	mm	220x220x43	220x220x110			
Mounting	-	Fast Clip-on				
Conformity/Certifications	-	CE				

Versions

UL File n. E301228	ALFAB000BPB	ALFAB500BPB	ALFAB510BPB	ALFAB524BPTB	ALFAB548BPTB
RAL7032 - Gray - Code ending	delete B				
RAL9005 - Black - Code ending	delete B, add N (available on request)				
EMC - Code ending	M				
Reverse flow - Code ending	-	-	-	PR	-
Connection with terminals	-	-	K	-	-

Accessories

Filter mat, standard type	ALFABPB0				
Filter mat, high efficiency	ALFABPB0X				
Thermostat 0-60°C, NO contact	-	-	-	THV2	-
Power cord 1m	-	-	SPINOTTOA2-10	-	-
Fan speed controller	-	-	FSC	-	-
Hood for IP55	-	-	-	CUFF20B	-

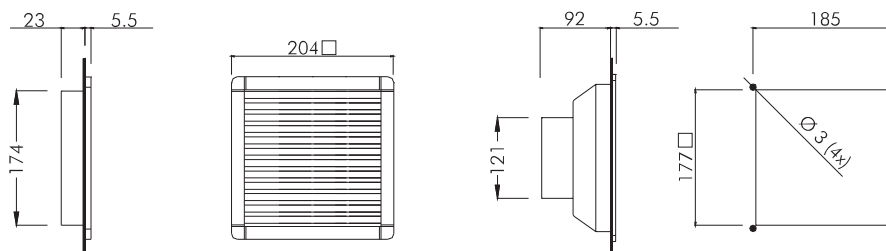

Specifications, values and drawings are subject to change without notice.