



ALFA35 - ALFA36




Features	Unit	ALFA3000BPB	ALFA3500BPB	ALFA3510BPB	ALFA3540BPB	ALFA3600BPB	ALFA3610BPB
Air flow rate (free blow)	m ³ /h	-	500 (570)			630 (700)	
Air flow rate with exit filter	m ³ /h	-	370 (410)			470 (520)	
Power supply	V/Hz	-	230 / 50-60	115 / 50-60	400 / 50-60	230 / 50-60	115 / 50-60
Dimensions HxWxD	mm	325x325x30		325x325x151			
Power consumption	W	-	70 (90)		60 (70)	130 (180)	
Current consumption	A	-	0.40 (0.38)	0.80 (0.76)	0.18 (0.15)	0.55 (0.81)	1.10 (1.62)
Overcurrent protection	-	-	thermal				
Electrical connection	-	-	3-poles terminals 2.5mm ²		4-p.t. 2.5mm ²	3-poles terminals 2.5mm ²	
Duty cycle	-	-	100%				
Operating temperature	°C (°F)	-10 / +70 (+14/+158)					
Protection degree / Class	-	IP54		IP54 / Class I			
Noise level	dB(A)	-	65 (68)			72 (73)	
Flow direction	-	-	outside-in				
Bearing	-	-	ball				
Filter mat EN779	-	G3		G3			
Service life (at 40°C)	hr	-	50 000				
Material	-	ABS UL94V-0 color RAL7035					
Wall thickness	mm	1.2 - 2.4					
Gasket	-	self-adhesive					
Weight (with packaging)	kg	0.64 (0.78)	3.00 (3.25)			3.65 (3.90)	
Package dimensions	mm	340x340x50		340x340x180			
Mounting	-	fast clip-on					
Conformity/Certifications	-	CE					

Versions

UL - File E301228	ALFA3000BPUB	ALFA3500BPUB	ALFA3510BPUB	-	ALFA3600BPUB	-
RAL7032 - Gray - Code ending	delete B					
RAL9005 - Black - Code ending	delete B, add N (available on request)					
EMC-Code ending	M					
Reverse flow- Code ending	-		PR			-

Accessories

Filter mat, standard type	ALFAFBP30					
Filter mat, high efficiency	ALFAFBP30X					
Thermostat 0-60°C, NO contact	-				THV2	
Hood for IP55	CUFF30B					

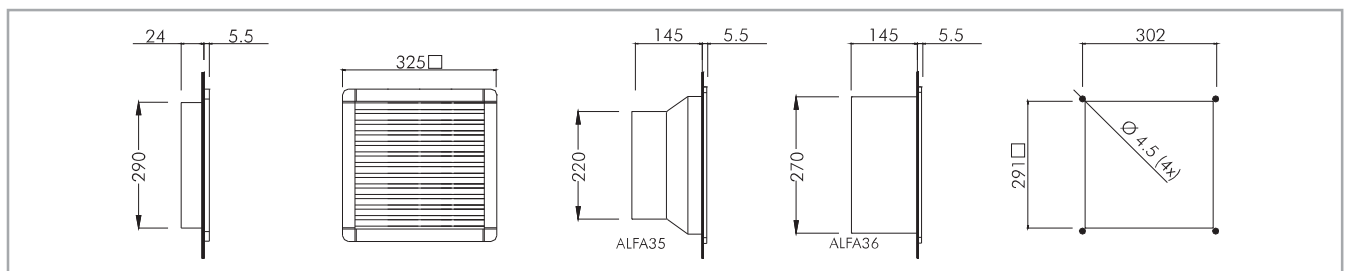

Specifications, values and drawings are subject to change without notice.