

Inclinometer MEMS / capacitive	IN88, 1- and 2-dime	nsional C	CANopen	
	E1 c us rots	The inclinometers of the IN88 s 2-dimensional inclinations in the inclinations up to 360°. With their high robustness, the and their wide temperature ran devices are ideally suitable for automation applications.	he range of ±85° c sir protection leve nge from -40°C to ·	or 1-dimensional I up to max. IP69k +85°C, these
IP       Image: Shock / vibration resistant       Image: Shock / vibration resistant         High protection level       Shock / vibration resistant       Reverse polarity protection	Redundancy Redundancy Temperature range			
Robust	169k in one device.	Versatile <ul> <li>Parameterizable filter.</li> </ul>		
<ul> <li>High protection rating IP67 and IP</li> <li>Highest robustness thanks to met</li> <li>Stable accuracy over the whole to -40°C up to +85°C.</li> <li>Non long-term drift thanks to sense</li> </ul>	al housing. emperature range from	<ul> <li>Measuring direction 1- or 2-d</li> <li>With 1 x M12 connector or 2 :</li> <li>Stacked installation possible</li> </ul>	x M12-connector.	
<ul> <li>Highest robustness thanks to met</li> <li>Stable accuracy over the whole to -40°C up to +85°C.</li> <li>Non long-term drift thanks to sense</li> </ul> Order code           8.11           Ty           Image: Measuring direction	al housing. emperature range from sor array technique. N88 . X 2 1 . 1 2 X pe	<ul> <li>Measuring direction 1- or 2-d</li> <li>With 1 x M12 connector or 2 :</li> <li>Stacked installation possible</li> </ul>	x M12-connector. for redundancy. Type of	connection
<ul> <li>Highest robustness thanks to met</li> <li>Stable accuracy over the whole to -40°C up to +85°C.</li> <li>Non long-term drift thanks to sense</li> <li>Order code 8.11 Ty</li> <li>Measuring direction 1 = 1-dimensional 6 = ±8</li> </ul>	al housing. emperature range from sor array technique. N88 . X 2 1 . 1 2 X pe G G Interface	<ul> <li>Measuring direction 1- or 2-d</li> <li>With 1 x M12 connector or 2 :</li> <li>Stacked installation possible</li> </ul>	x M12-connector. for redundancy. <i>Type of</i> 1 = 1 x M12	
<ul> <li>Highest robustness thanks to met</li> <li>Stable accuracy over the whole to -40°C up to +85°C.</li> <li>Non long-term drift thanks to sense</li> <li>Order code 8 Ty</li> <li>Measuring direction 1 = 1-dimensional 2 = 2-dimensional 5 = ±8 7 = 0°</li> </ul>	al housing. emperature range from sor array technique. N88 . X 2 1 . 1 2 X pe Ø Ø Ø Ø Ø Ø easuring range 5° <sup>1)</sup> Ø Ø Ø <i>Interface</i> 2 = CANoper	<ul> <li>Measuring direction 1- or 2-d</li> <li>With 1 x M12 connector or 2 :</li> <li>Stacked installation possible</li> </ul>	x M12-connector. for redundancy. <i>Type of</i> 1 = 1 x M12	<i>connection</i> connector, 5-pin
<ul> <li>Highest robustness thanks to met</li> <li>Stable accuracy over the whole to -40°C up to +85°C.</li> <li>Non long-term drift thanks to sense</li> <li>Order code         <ul> <li>8.11 Ty</li> <li>Measuring direction 1 = 1-dimensional</li> <li>2 = 2-dimensional</li> <li>7 = 0°</li> </ul> </li> <li>Accessories</li> </ul>	al housing. emperature range from sor array technique. N88 . X 2 1 . 1 2 X pe Ø Ø Ø Ø Ø Ø easuring range 5° <sup>1)</sup> Ø Ø Ø <i>Interface</i> 2 = CANoper	<ul> <li>Measuring direction 1- or 2-d</li> <li>With 1 x M12 connector or 2 :</li> <li>Stacked installation possible</li> <li>Stacked installation possible</li> </ul>	x M12-connector. for redundancy. <i>Type of</i> 1 = 1 x M12	<i>connection</i> connector, 5-pin connector, 5-pin
<ul> <li>Highest robustness thanks to met</li> <li>Stable accuracy over the whole to -40°C up to +85°C.</li> <li>Non long-term drift thanks to sense</li> <li>Order code 8 Ty</li> <li>Measuring direction 1 = 1-dimensional 6 = ±8 2 = 2-dimensional 7 = 0°</li> <li>Accessories</li> <li>Adapter plate</li> </ul>	al housing. emperature range from sor array technique. N 88 . X 2 1 . 1 2 X pe easuring range 5° <sup>1)</sup> 2 = CANoper 360° <sup>2)</sup>	<ul> <li>Measuring direction 1- or 2-d</li> <li>With 1 x M12 connector or 2 :</li> <li>Stacked installation possible</li> <li>Stacked installation possible</li> </ul>	x M12-connector. for redundancy. <i>Type of</i> 1 = 1 x M12	<i>connection</i> connector, 5-pin connector, 5-pin Order no.
<ul> <li>Highest robustness thanks to met</li> <li>Stable accuracy over the whole to -40°C up to +85°C.</li> <li>Non long-term drift thanks to sense</li> <li>Order code 8 Ty</li> <li>Measuring direction 1 = 1-dimensional 2 = 2-dimensional 7 = 0°</li> <li>Accessories</li> <li>Adapter plate</li> <li>Connection technology</li> </ul>	al housing. emperature range from sor array technique. N88 . X 2 1 . 1 2 X easuring range 5° <sup>1)</sup> 2 I . 1 2 X C 0 C I . 1 C I . 1 2 X C 0 C I . 1 2 X C 0 C I . 1 C I . 1 2 X C 0 C I . 1 C I . 1 2 X C 0 C I . 1 C I . 1 2 X C 0 C I . 1 C I . 1 X 0 C I . 1	<ul> <li>Measuring direction 1- or 2-d</li> <li>With 1 x M12 connector or 2 :</li> <li>Stacked installation possible</li> <li>Stacked installation possible</li> </ul>	x M12-connector. for redundancy. Type of 1 = 1 x M12 3 = 2 x M12	connection connector, 5-pin connector, 5-pin Order no. 8.0010.4062.0000
<ul> <li>Highest robustness thanks to met</li> <li>Stable accuracy over the whole to -40°C up to +85°C.</li> <li>Non long-term drift thanks to sense</li> <li>Order code 8</li> <li>Measuring direction 1 = 1-dimensional 6 = ±8 2 = 2-dimensional 7 = 0°</li> <li>Accessories</li> <li>Adapter plate</li> </ul>	al housing. emperature range from sor array technique. N88 . X 2 1 . 1 2 X pe easuring range 5° <sup>1)</sup> 2	<ul> <li>Measuring direction 1- or 2-d</li> <li>With 1 x M12 connector or 2 :</li> <li>Stacked installation possible</li> <li>Stacked installation possible</li> <li>Supply voltage</li> <li>2 = 10 30 V DC</li> </ul>	x M12-connector. for redundancy. Type of 1 = 1 x M12 3 = 2 x M12 straight	connection connector, 5-pin connector, 5-pin Order no. 8.0010.4062.0000 Order no.
<ul> <li>Highest robustness thanks to met</li> <li>Stable accuracy over the whole to -40°C up to +85°C.</li> <li>Non long-term drift thanks to sense</li> <li>Order code 8 Ty</li> <li>Measuring direction 1 = 1-dimensional 2 = 2-dimensional 7 = 0°</li> <li>Accessories</li> <li>Adapter plate</li> <li>Connection technology</li> </ul>	al housing. emperature range from sor array technique. N 88 · X 2 1 · 1 2 X pe easuring range 5° <sup>1)</sup> C Interface 2 = CANoper 360° <sup>2)</sup> M12 female connector with c single ended 5 m [16.40'] PVC cable M12 male connector with ext single ended 5 m [16.40'] PVC cable	<ul> <li>Measuring direction 1- or 2-d</li> <li>With 1 x M12 connector or 2 :</li> <li>Stacked installation possible</li> <li>Stacked installation possible</li> <li><i>Supply voltage</i> 2 = 10 30 V DC</li> <li>Supply not for Bus in, 5-pin, A coded, second thread for Bus out, 5-polig, A coded</li> <li>Scoupling nut for Bus in, 5-polig, A coded</li> </ul>	x M12-connector. for redundancy. Type of 1 = 1 x M12 3 = 2 x M12 straight 0 led, straight 0	connection connector, 5-pin connector, 5-pin Order no. 8.0010.4062.0000 Order no. 15.00.6091.A211.005M
<ul> <li>Highest robustness thanks to met</li> <li>Stable accuracy over the whole to -40°C up to +85°C.</li> <li>Non long-term drift thanks to sense</li> <li>Order code 8 Ty</li> <li>Measuring direction 1 = 1-dimensional 2 = 2-dimensional 7 = 0°</li> <li>Accessories</li> <li>Adapter plate</li> <li>Connection technology</li> </ul>	al housing. emperature range from sor array technique. N888 X X 2 1 1 1 2 X pe 0 0 0 0 1 1 2 0 0 easuring range 5° <sup>1)</sup> 2 = CANoper 360° <sup>2)</sup> for installation identical to K0 M12 female connector with c single ended 5 m [16.40'] PVC cable M12 male connector with ext single ended 5 m [16.40'] PVC cable M12 female connector with ext single ended 5 m [16.40'] PVC cable M12 female connector with ext single ended 5 m [16.40'] PVC cable M12 female connector with c Deutsch connector, 6-pin, DT 1 m [3.28'] PVC cable	<ul> <li>Measuring direction 1- or 2-d</li> <li>With 1 x M12 connector or 2 :</li> <li>Stacked installation possible</li> <li>Stacked installation possible</li> <li><i>Supply voltage</i> 2 = 10 30 V DC</li> <li>Supply not for Bus in, 5-pin, A coded, second thread for Bus out, 5-polig, A coded</li> <li>Scoupling nut for Bus in, 5-polig, A coded</li> </ul>	x M12-connector. for redundancy. 1 = 1 x M12 3 = 2 x M12 straight ( led, straight ( d, straight (	<i>connection</i> connector, 5-pin connector, 5-pin 0rder no. 8.0010.4062.0000 0rder no. 05.00.6091.A211.005M

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories

Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection\_technology

Can only be ordered in conjunction with measuring direction 2-dimensional.
 Can only be ordered in conjunction with measuring direction 1-dimensional.

Kübler

### Inclinometer MEMS / capacitive

IN88, 1- and 2-dimensional

**CANopen** 

#### Technical data

#### General electrical characteristics

Supply voltage		10 30 V DC			
Current consumption (no	o load)	max. 70 mA			
Reverse polarity protection of the supply voltage		yes			
Measuring axes		1 or 2			
Measuring range	1-dimensional 2-dimensional	360°, no limit stop ±85° (see order code)			
Resolution		0.01°			
Accuracy at 25°C <sup>1)</sup>	1-dimensional 2-dimensional	typ. ±0.2° typ. ±0.4°			
Repeat accuracy		±0.2°			
Transverse sensitivity <sup>2)</sup>		typ. ±0.3°			
Temperature coefficient		typ. ±0.006°/K			
Sampling rate		50 Hz (20 ms)			
Limit frequency with B	utterworth filter factory setting	0.1 10 Hz, 8th order 10 Hz			
CE compliant acc. to		EMC guideline 2014/30/EU RoHS guideline 2011/65/EU			
UL approval <sup>3)</sup>		file 224618			
E1 type-approval		10R-058255			

#### EMC

Relevant standards	EN 61326-1	Electrical equipment for measure- ment, control and laboratory use
	EN 61000-6-2	Immunity for industrial environments
EN 55011 Klasse E	3, EN 61000-6-3	Emitted interferences for residential environments
	EN ISO 14982	Agricultural and forestry machinery, electromagnetic compatibility, test methods and acceptance criteria
EN	13309:2010-07	Construction machinery - Electro- magnetic compatibility of machines with internal supply voltage

Mechanical characteristics					
Connection	1 x M12 connector 2 x M12 connector	5-pin, male connector 5-pin, male connector / 5-pin, female connector			
Weight		approx. 185 g [6.53 oz]			
Protection acc. to	EN 60529	IP67 / IP69k <sup>3)</sup>			
Working temperat	ture range	-40°C +85°C [-40°F +185°F]			
Material	housing	aluminum			
Shock resistance acc. to EN 60068-2-27		1000 m/s², 6 ms			
Vibration resistance acc. to EN 60068-2-6		100 m/s <sup>2</sup> , 10 2000 Hz			
Dimensions		80 x 60 x 23 mm [3.15 x 2.36 x 0.91"]			

Interface characteristics CAN	open
Interface	CAN high-speed acc. to ISO 11898, Basic- and Full-CAN CAN specification 2.0 B
Protocol	CANopen profile DS410 V1.3 with manufacturer-specific add-ons, communication profile DS301 V4.2
Baud rate	10 kbit/s, 20 kbit/s, 50 kbit/s, 125 kbit/s, 250 kbit/s, 500 kbit/s, 800 kbit/s, 1 Mbit/s software configurable
Node address	1 127 software configurable
Termination switchable	software configurable
LSS protocol	DS305 layer setting services 2.2

#### **General information on CANopen**

The CANopen inclinometers support the latest CANopen communications profile according to DS301. In addition, device-specific profiles such as the inclinometer profile DS410 and DS305 (LSS) are available.

The following operating modes may be selected: Polled Mode, Cyclic Mode, Sync Mode. Moreover, scale factors, preset values and many other additional parameters can be programmed via the CAN bus. When switching the appliance on, all parameters are loaded from a flash memory. These parameters have previously been stored in a zero-voltage secure manner. The output values **position, position raw value, sensor temperature and sensor information** can be combined very variably as a PDO (PDO mapping). The inclinometers are available with one or two connectors.

The device address and baud rate can be set/modified by means of the software. The two-color LED indicates the operating or fault status of the CAN bus, as well as the status of the internal diagnostics.

#### LSS layer setting services DS305 V2.2

- Global command support for node address and baud rate configuration.
- Selective protocol via identity object (1018h).

#### **CANopen communication profile DS301 V4.2**

Among others, the following functionality is integrated (Class C2 functionality):

- NMT slave.
- Heartbeat protocol.
- Identity object.
- Error behavior object.
- Variable PDO mapping, 2 sending PDO's.
- Node address, baud rate and programmable CANbus termination.

#### **CANopen inclinometer profile DS410 V1.3**

The following parameters can be programmed:


- Variable PDO mapping of position, position raw value, sensor temperature and sensor information.
- Extended failure management.
- User interface with visual display of bus and failure status 1 LED two-color.
- Customer-specific protocol.
- "Watchdog controlled" device.

- 1) Over the whole temperature and max. measuring range
- 1-dimensional  $\leq \pm 0.4^{\circ}$ ; 2-dimensional  $\leq \pm 1^{\circ}$ .
- 2) Only for 2-dimensional measuring direction.
- 3) The IP protection class is not UL-tested. Verified by Kübler.
- A full description of the technical data can be found in the relevant product manual at **www.kuebler.com.**


Inclinome MEMS / c			IN88, 1- a	nd 2-dim	ensional			CANopen
Terminal assi	gnment							
Interface	Type of connection	1 x M12 conn	ector, 5-pin					
				Bus IN				
2	1	Signal:	+V	0 V	CAN_GND	CAN_H	CAN_L	
		Pin:	2	3	1	4	5	
Interface	Type of connection	2 x M12 conn	ector, 5-pin					
					Bus OUT			
		Signal:	+V	0 V	CAN_GND	CAN_H	CAN_L	
2	3	Pin:	2	3	1	4	5	
2	5		Bus IN					
			+V	0 V	CAN_GND	CAN_H	CAN_L	
		Pin:	2	3	1	4	5	

### **Direction of inclination**

1-dimensional




### 2-dimensional








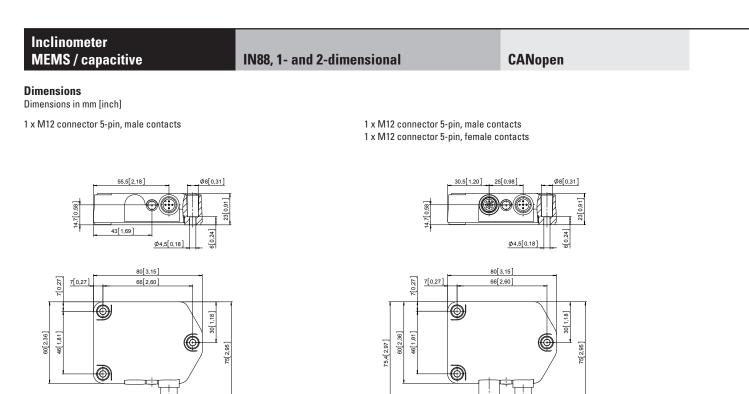

#### Adapter plate

for installation identical to Kûbler inclinometer IS60

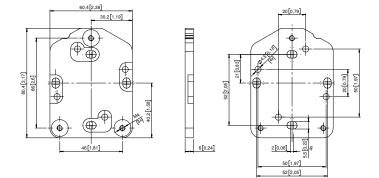

4