



# EURO 95



Article: **43426 E**

Feed-through terminal block - Yellowgreen  
 Screw connection - 95mm<sup>2</sup> / 3/0AWG - Width 26 mm



## GENERAL DATA

Series	<b>EURO 95</b>
Item	<b>43426 E</b>
Weight/Piece	<b>174 g</b>
Customs tariff	<b>85369010</b>
Page/Catalog	<b>44 / 01</b>
Colour	<b>Yellowgreen</b>
Q.ty p.pck.	<b>10</b>
Q.ty p. box	<b>160</b>

## TECHNICAL DATA / DIMENSIONS

### Dimensions

Width mm(in.)	26 (1.02)
Length mm(in.)	74 (2.91)
Height mm(in.)	75 (2.96)
Mounting type (EN 60715)	Omega TH35

### Technical data

Maximum load current	232A
Insulating material	PA
Self-extinguishing degree acc. to UL94	V2
Rated surge voltage	6kV
Pollution degree	3
Surge voltage category	III
Insulating material group	I
Nominal Voltage	800V
Nominal Current	232A

### Connection data

Conductor cross-section solid min/max	35 / 95 mm <sup>2</sup>
Conductor cross-section stranded min/max	35 / 95 mm <sup>2</sup>
AWG min/max	4-3/0 AWG
Max conductor cross-section stranded with ferrule with plastic sleeve DIN 46228/4	-



Stripping length	max 20mm / - in
Screw	M8 – esagono incassato – Ch 6
Tightening torque	4,5Nm / 40 Lb-In

## APPROVALS

**IMQ**    **EN60947-7-1**    95mm<sup>2</sup> – 800V – 232A  
**EN60068-2-11**    Salt mist test for 96 hours

## ENEL DV27


**UL**® **UL1059**  
E203985

**CSA** **C22.2 NO 158-10**

**SCCR** 100kA

AWG 4-3/0 – 600V – 185A

## TECHNICAL DRAWINGS

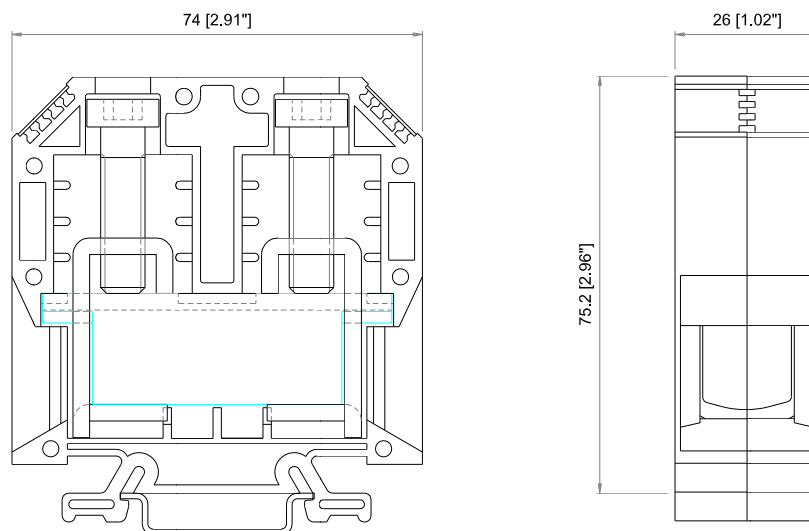



## ACCESSORIES

### Marking

Item	Description
<b>43059</b>	Single-digit marking tag (5 x 3 mm) - white
<b>43060/0 ÷ 43060/9</b>	Single-digit marking tag (5 x 3 mm) – with marking: 0 ÷ 9
<b>43060/A ÷ 43060/Z</b>	Single-digit marking tag (5 x 3 mm) – with marking: A ÷ Z
<b>43094</b>	Marking tag adapter – 6 slots for marking tags
<b>43196</b>	Marking tags (6 x 12 mm) - white (special marking on request)
<b>438MFC0612TB</b>	Tags 6x12 for MI and 438MWK0512TBA (39tags x 20cards)
<b>438MWK0512TBA</b>	Tag adapter for: MI-EURO/Weid-WDU-ZDU/Klemsan -1box=250

### DIN RAIL system - Mounting and Installation material

Item	Description
<b>43910</b>	Steel Omega rail 35/7,5mm - 2mt length
<b>43910/F</b>	Slotted steel Omega rail 35/7,5mm - 2mt length
<b>43911</b>	Steel Omega rail 35/15mm - 2mt length
<b>43911/F</b>	Slotted steel Omega rail 35/15mm - 2mt length
<b>43028</b>	Angled support bracket
<b>43442</b>	EURO STOP - End bracket width 9
<b>43444</b>	EURO STOP - End bracket width 6
<b>43447</b>	EURO STOP - Snap-on end bracket width 6
<b>43449</b>	EURO STOP - End bracket cover profile carrier
<b>43449-C</b>	EURO STOP - Cover profile - Length 100cm