





**Part number: C30000185 - Model: SC30SP-AE25 TD1 NO/NC**

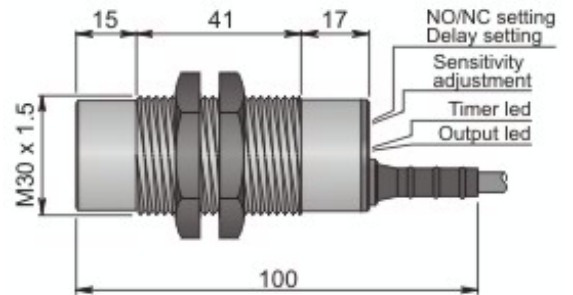

Dimension in mm


### TECHNICAL CHARACTERISTICS

Working voltage:	20 ÷ 250 Vac
Output type:	AC
Function:	NO/NC programmable
Actuation type:	Delayed
Delay range (min):	0 ÷ 1
Sensing distance (mm):	0 ÷ 25 (adjustable)
Hysteresis (%Sn):	< = 20
Max. switching frequency:	Max = 10 Hz / min = In relation to delay
Repeatability (%Sn):	< 10
Max. output current:	500 mA
Min. output current:	10 mA (minimum current for relèase)
Max peak current for 20msec:	1.5 A
Residual current:	< = 2 mA
Voltage drop:	< 6 V
Led indicator:	Yellow = output / Blinking blue = timer
Shielding:	Embeddable
Mechanical characteristics:	M30x1.5
Housing material:	Plastic
Connection type:	Cable 3 m
Cable type:	3x0.35 PVC
Temperature limits:	-20 ÷ +70 °C
IP rating:	IP 67
Weight:	300 g




Part number: C30000185 - Model: SC30SP-AE25 TD1 NO/NC

**WIRING DIAGRAM**

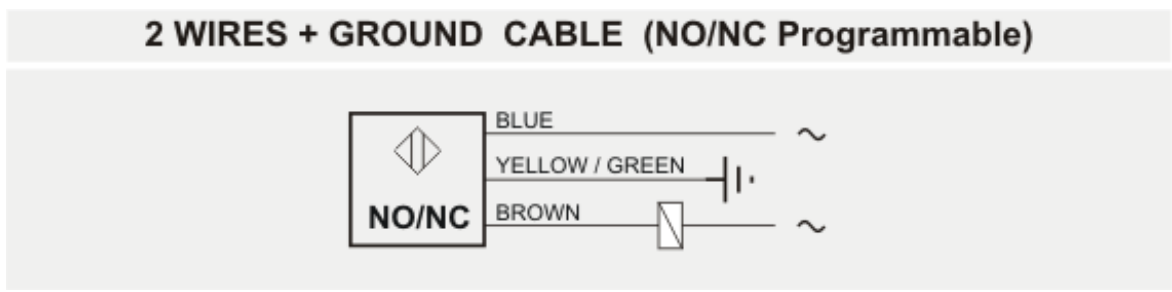

**INSTRUCTIONS FOR CORRECT INSTALLATION**

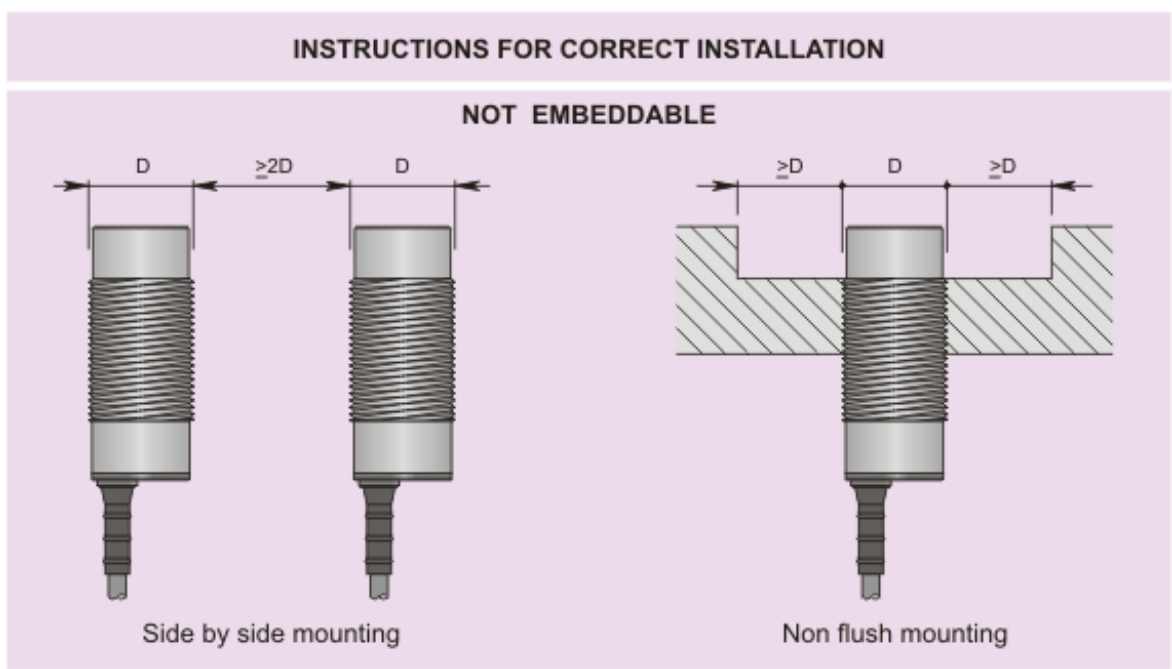

**REAR VIEW**

