


KombiSIGN 40

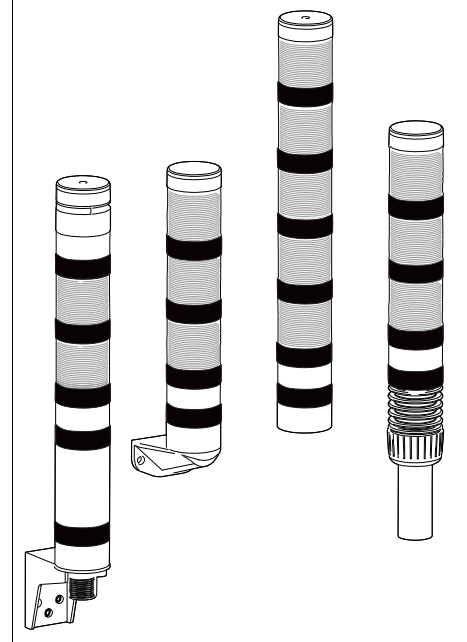


! DANGER

⚡





(D) Anschluss **ausschließlich** durch ausgebildete Elektro-Fachkräfte.
 (GB) Electrical connection is to be made by trained electrical specialists **only**.
 (F) Le branchement doit **uniquement** être effectué par des professionnels.
 (I) Il collegamento deve essere eseguito **solo** da elettricisti specializzati.
 (E) La conexión **sólo** debe ser realizada por electricistas debidamente formados.
 (PT) A ligação deve ser feita **exclusivamente** por profissional elétrico especializado.
 (NL) De aansluiting mag **enkel** gebeuren door erkende vakmensen.
 (CZ) Připojení smí **provádět** pouze kvalifikovaný personál.
 (PL) Podłączenie **wyłącznie** przez specjalistów-elektryków.
 (FI) Liittäminen kuuluu **ainoastaan** koulutettujen sähköalan ammattilaisten tehtäviin.
 (RUS) Подключение проводов только специалистом-электриком.
 (TR) Bağlantı **sadece** eğitimli elektrik teknisyenleri tarafından yapılmalıdır.
 (CN) 布线需由专业电工执行




! DANGER
EVS 634 x40 75

(D) Bei Epilepsie ungeeignet!
 (GB) Unsuitable for epilepsy sufferers.
 (F) Ne convient pas aux personnes souffrant d'épilepsie.
 (I) Inadatto per epilettici.
 (E) Inadecuado para epilepticos.
 (PT) Não aconselavel a pessoas que sofrem de Epilepsia.
 (NL) Niet geschikt voor epileptici.
 (CZ) Nevhodné pro epileptiky.
 (PL) Nie stosować przy zchorzeniu padaczki.
 (FI) Ei soveltu epileptikoille.
 (RUS) Не подходит для страдающих эпилепсией.
 (TR) Epilepsi hastalığı olanların kullanmaması önerilir.
 (CN) 不适用于癫痫病患者

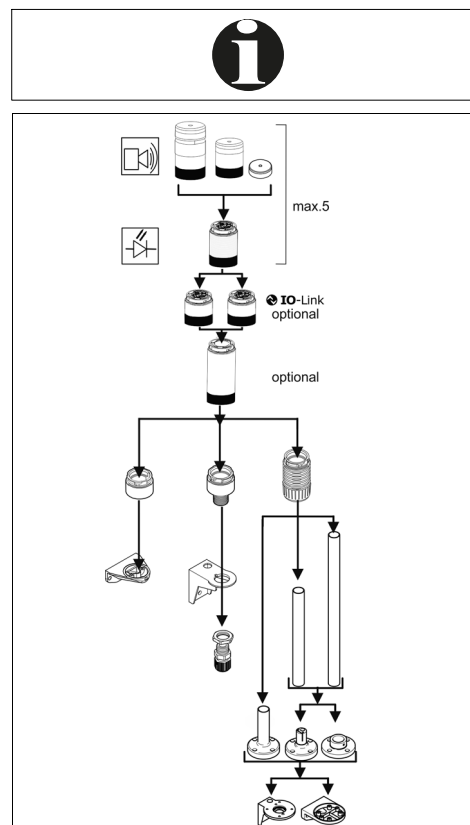



	630 x00 75	24V ≈	
	631 400 55 631 800 55		
	634 x10 75 634 x30 75	24V ≈ 24V ≈	I_{max} 50 mA I_{max} 50 mA
	634 x20 55 634 x40 55	24V = 24V =	I_{max} 65 mA I_{max} 65 mA
	634 450 55	24 V =	I_{max} 100 mA
	635 x00 75 635 x10 75	24V ≈ 24V ≈	I_{max} 80 mA I_{max} 200 mA

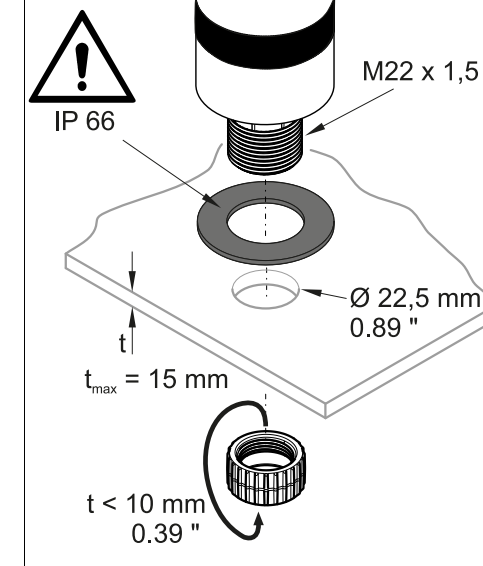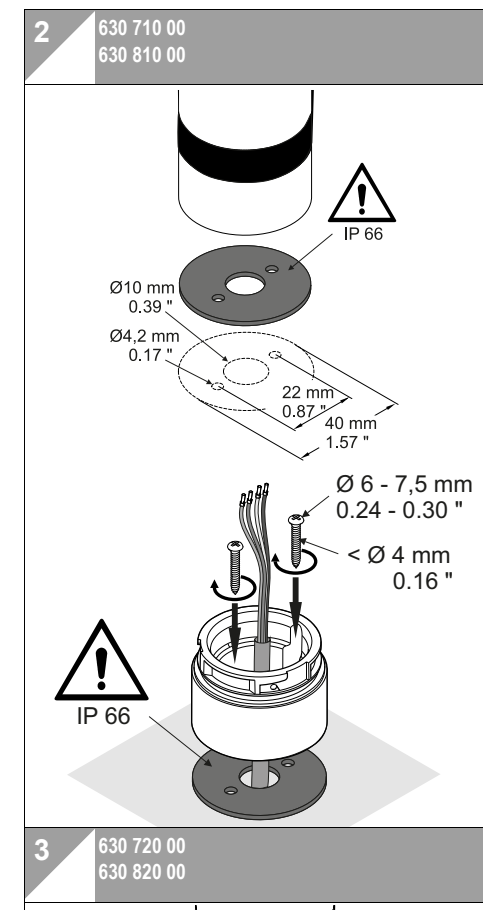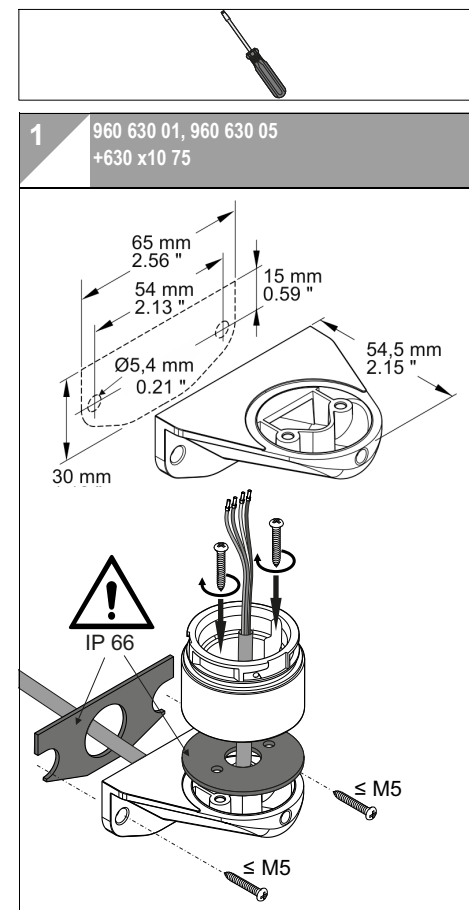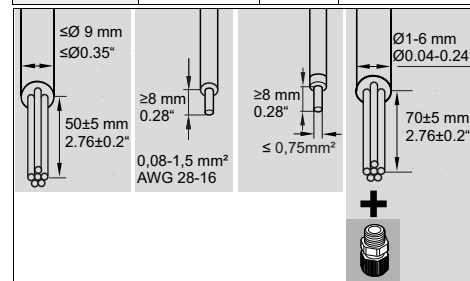

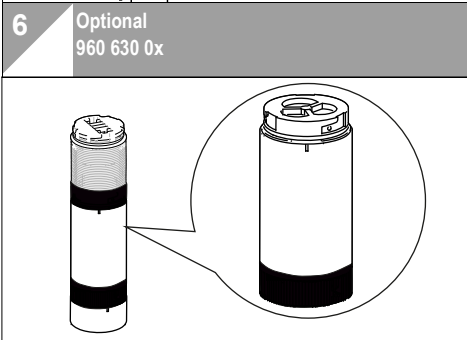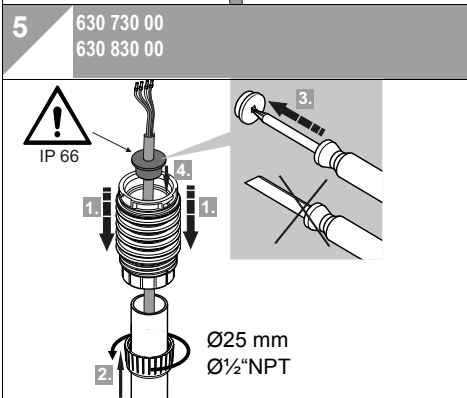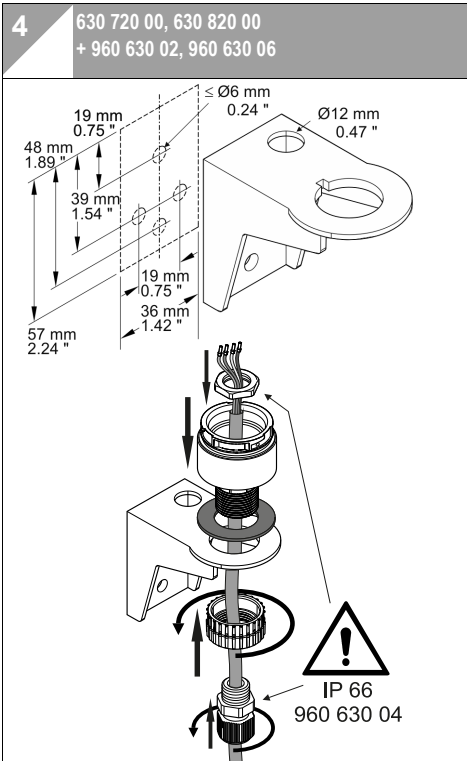

7a 630 700 75
630 800 75

CAUTION

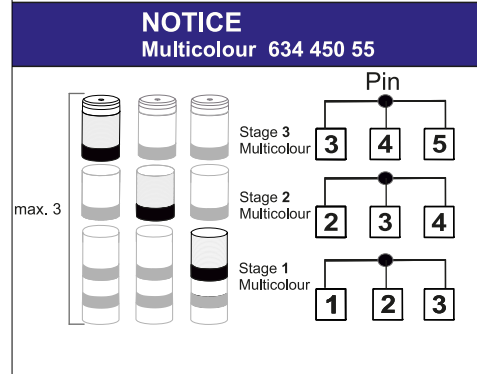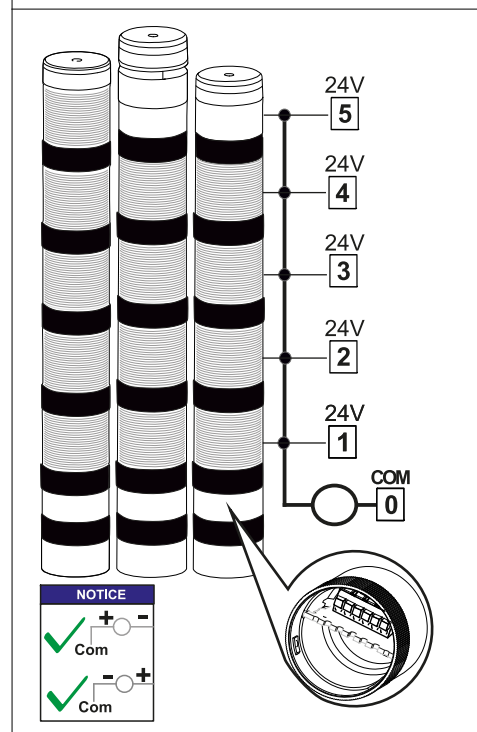


Colour (RD)	24V		
Colour (GN)		24V	
Colour (YE)	24V	24V	
Colour (BU)			24V
Colour (WH)	24V	24V	24V
Colour (CYAN)		24V	24V
Colour (VIOL)	24V		24V

7b 631 400 55
631 800 55


IO-Link

CAUTION

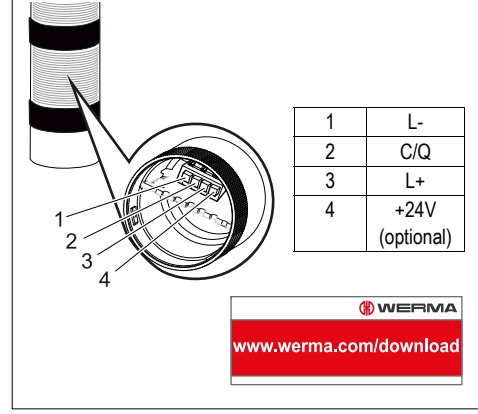


7c 634 x10 75
634 x30 75

TwinLIGHT

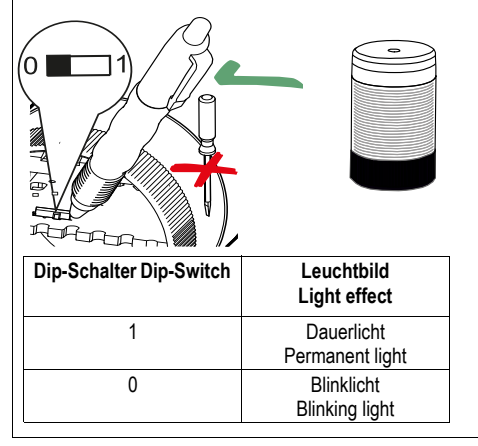


7d 634 x20 55
634 x40 55

TwinFLASH

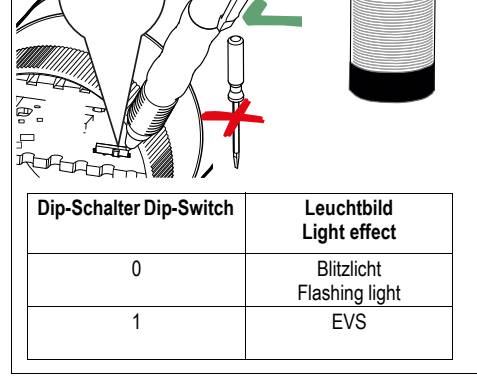

7e 635 x00 75


WARNING

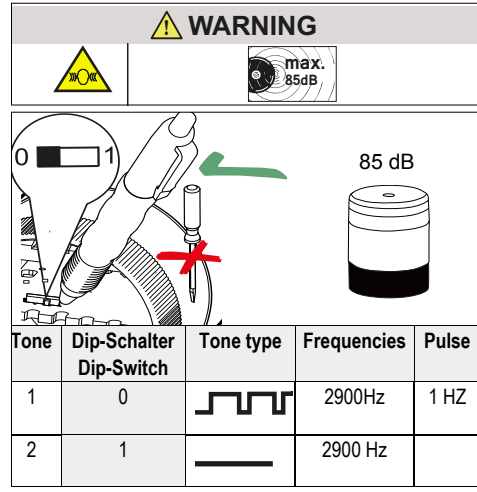

7f 635 x10 55

WARNING


max. 89-95dB

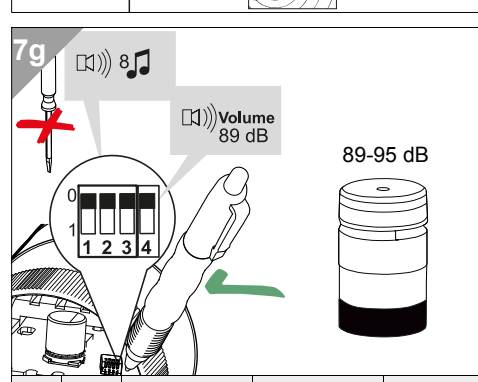

Tone	Code 1234	Tone type	Frequencies	Pulse
1	000x	Dauerton continuous,	4300 Hz	
2	100x	Dauerton continuous,	2100 Hz	
3	010x	pulsierend, pulse	4300 Hz	1 Hz
4	110x	pulsierend, pulse	2100 Hz	1 Hz
5	001x	pulsierend, pulse	4300 Hz	420 Hz
6	101x	pulsierend, pulse	2100 Hz	420 Hz
7	011x	pulsierend, pulse	4300 Hz	20 Hz
8	111x	Sweep	2100-4300 Hz	

Volume

000x 89 dB 95 dB

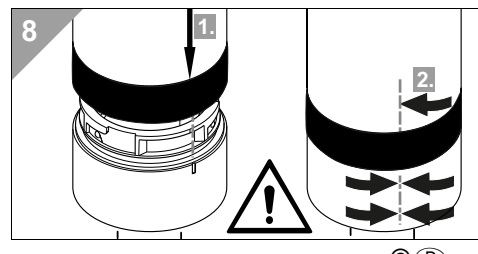

310.630.001.0317_AG © D

