
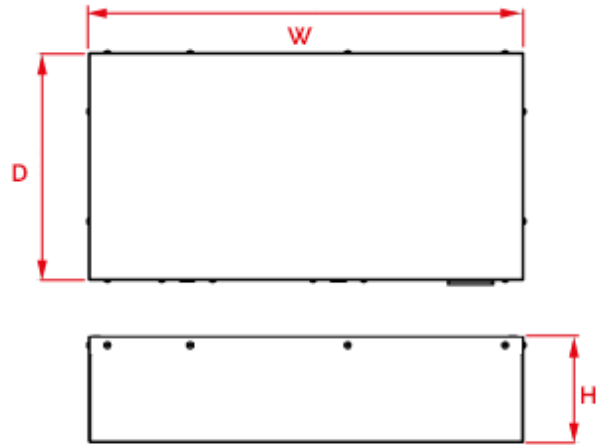


EXW15H - Top

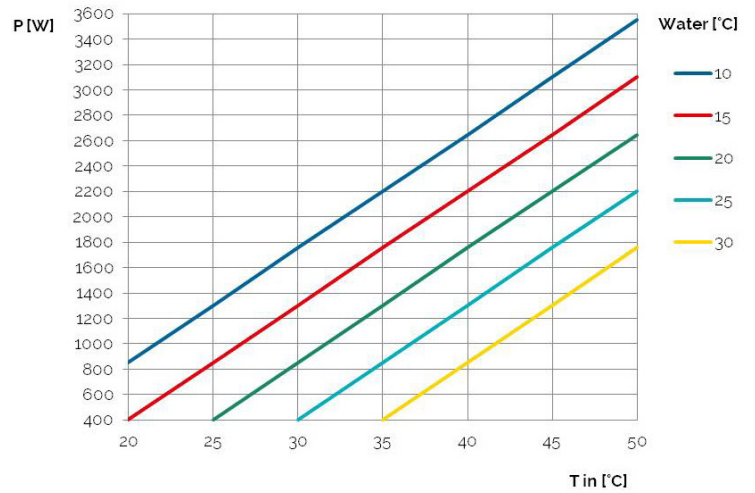

CODICE - CODE - ARTIKELNUMMER - CODIGO	M.U.	EXW15H02207000
Potenza di raffreddamento - Cooling Capacity - Kälteleistung - Capacidad de refrigeración $\Delta T=25^{\circ}\text{C}$	W	2200
Alimentazione - Power Supply - Spannungsversorgung - Alimentación eléctrica	V-ph-Hz	230-1-50/60
Altezza / Larghezza / Profondità - Height / Widht / Depth - Höhe / Breite / Tiefe - Altura / Ancho / Profundidad (HxWxD)	mm	189x772x404
Portata aria ventilatore - Cabinet fan flow - Luftleistung Schrankseite - Caudal del ventilador	m ³ /h	575
Corrente assorbita - Absorbed current - Stromaufnahme - Corriente absorbida	A	0,23 / 0,29
Fusibile T - T PreFuse - Absicherung - Fusibile T	A	2
Potenza Assorbita dal Ventilatore Absorbed fan power - Leistungsaufnahme des Lüfter -Potencia absorbida por el ventilador	W	52 / 65
Portata Acqua - Water flow - Wassermenge - Caudal de agua	l/h	150
Massima Pressione Acqua - Max water pressure - Max Wasserdruck - Presión máxima agua	kPa	1000
Perdita di Carico - Water pressure drop - Druckverlust, Wasserseite - Pérdida de carga lato agua	kPa	30
Limiti Temperatura - Side cabinet temperature limits - Temperaturbereich Schrankseite - Limites temperatura lado armario	°C	+10 / +65
Attacchi Lato Acqua Water connections diam - Wasseranschlüsse - Uniones lado agua	"	1 / 2
Protezione lato armadio - Cabinet Protection Degree - Schutzgrad Schrankseite - Clase de protección del armario	IP/Type	54 / -
Rumorosità - Noise Level - Geräuschpegel - Nivel de ruido	dB(A)	58
Peso - Weight - Gewicht - Peso	kg	30